

PREFERRED SUPPLIER INFORMATION

NBS REFERENCE M50.

MANUFACTURER:

ALTRO LTD

Works Road, Letchworth Garden City


Hertfordshire, SG6 1NW

Tel: 01462 707600

E-mail: enquiries@altro.com

Website: <http://www.altro.co.uk>

Supplier Contact: Altro Customer Care Centre enquiries@altro.com

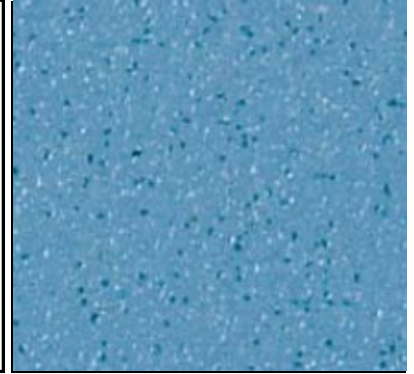

PRODUCT DESCRIPTION

ICL APPROVED SPECIFICATION

Range: Altro Walkway 20

Description: Decorative, flexible, non-directional PVC Safety Flooring.

Application: Areas of use include corridors, toilets/bathrooms, changing rooms, food serveries, classrooms, circulation areas.

Other: Features Altro Easyclean Maxis PUR™ Technology providing superior cleanability, significantly reducing cleaning and maintenance costs. Slip Resistance pendulum measurement of PTV 36 or above low potential for slip & DIN 51130 R10. Suitable for under floor heating EN 12667. Can be used with Altro Everlay if a loose lay system is required or Altro Acoustic Underlay 1101 to achieve Acoustic properties. Fully compatible with Altro Whiterock wall cladding.

Environmental: Achieves a generic BREEAM A+ rating in all Education & Health applications. Contains 20% recycled content.

Recyclable: Post-installation clean off-cuts and all factory waste to be recycled by Altro Ltd via Recofloor. Packaging is 100% recyclable.

Warranty: 10 year product guarantee.

Production: Made in the UK

TYPICAL NBS SPECIFICATION

M50: 150A PLASTICS FLOORING

Standard: Approved Safety Flooring to Imperial College London Architectural Standards

Location: To architects finishes schedules.

Base: Sand cement screed or plywood sub base as architects details.

Preparation: Ardex UK Ltd, Arditex smoothing compound or AltroProof epoxy surface damp proof membrane by Altro Ltd

Manufacturer: Altro Ltd, Works Road, Letchworth Garden City, Hertfordshire, SG6 1NW

Range: Walkway 20

Type: Homogenous PVC vinyl to BS EN 13845. Classification For Use: BS EN 685 class 34 & 43

Width: 2000 mm **Thickness:** 2 mm (EN428) **Format:** Roll

Dimensions: 20m x 2 m (40m²) (EN426) **Weight:** 2.6kg/m² (EN430)

Colour: All colours approved.

Adhesives: AltroFix 15 or 365 for dry area. AltroFix 19 plus for wet area.

Seam welding: Hot-welding with matching Altro Welding Rod, as clause 680

Skirting: Skirting or Self-coved skirting incorporating Altro CF38R, C7/C8

Accessories: Clamping drain/channel by Wade International, Visedge VR Edge Strip by Howe Green Ltd.