

**PREFERRED SUPPLIER INFORMATION**

NBS REFERENCE K40

MANUFACTURER:

**BURGESS CEP LIMITED**


Address

Brookfield Road, Hinckley LE10 2LL

Tel 01455 618 787

E-mail [enquiries@burgesscep.com](mailto:enquiries@burgesscep.com)

Website: [www.burgesscep.com](http://www.burgesscep.com)

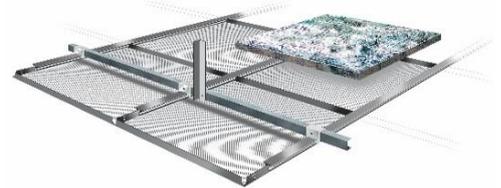

**PRODUCT DESCRIPTION**

ICL APPROVED SPECIFICATION

**Range:** Clip-in Metal Suspended Ceiling System

**Description:** Fully accessible suspended ceiling system which is simple to integrate with other services.

**Safety:** 1 hour fire rating (with acoustic infills)

**Application:** Clean rooms/Corridors/Toilets/Offices

**Other:** Acoustic flexibility. Easy to clean. Manufactured to BS EN 13964 ceiling standards and ISO 9001 Quality standards.

**Environmental:** 100% recyclable throughout the manufacturing process. ISO 14001 Environmental standards.

**Recyclable:** Old tiles are fully recyclable and can be collected upon request.

**Warranty:** 25 years

**Production:** Manufactured in the UK

**TYPICAL NBS SPECIFICATION**

**K40** CEILING TILE - This product is associated with the following NBS Create - 105, 115 & 130 (alterations)

**Standard:** Approved ceiling installation to Imperial College London Architectural Standards.

**Ceiling Type** Fully accessible clip-in concealed grid metal suspended ceilings.

**Access** Full

**Ceiling Module:** 600mm x 600mm.

**Suspension system:** Burgess H4 suspension comprising primary channels (GT112) installed at 1500mm centres maximum supported by angle hangers (GT114) at 1500mm centres maximum. Spring tee bars (GT115) at 600mm centres to be secured to channels by universal brackets (GT109). Soffit fixings to be specified by the Architect and supplied by the specialist ceiling contractor.

**Tiles and acoustic pads:** Burgess mild steel electro-plated zinc finish ceiling panels, bevel edged Type-A, can be plain or perforated to D278/D320/S321 to give 22%/14%/14% open area with a 10mm plain border.

Complete with a black fleece tissue faced acoustic pad fitted to rear of the metal tile. Tiles to have factory formed apertures for services where required. For recommendations regarding additional loading on the ceiling system please contact the BurgessCEP technical department.

**Colour/Finish** RAL9010 polyester powder coated finish with 20% gloss level.