

PREFERRED SUPPLIER INFORMATION

NBS REFERENCE K40

MANUFACTURER:

BURGESS CEP LIMITED


Address

Brookfield Road, Hinckley LE10 2LL

Tel 01455 618 787

E-mail enquiries@burgesscep.com

Website: www.burgesscep.com

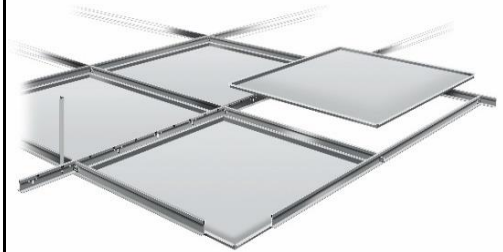

PRODUCT DESCRIPTION

ICL APPROVED SPECIFICATION

Range: Tegular Metal Suspended Ceiling System

Description: Fully accessible suspended ceiling system which is simple to integrate with other services.

Safety: 1/2 hour fire rating (with acoustic infills)

Application: Boardrooms/Corridors/Offices/Lecture theatres.

Other: Acoustic flexibility. Easy to clean. Manufactured to BS EN 13964 ceiling standards and ISO 9001 Quality standards.

Environmental: 100% recyclable throughout the manufacturing process. ISO 14001 Environmental standards.

Recyclable: Old tiles are fully recyclable and can be collected upon request.

Warranty: 25 years

Production: Manufactured in the UK

TYPICAL NBS SPECIFICATION

K40 CEILING TILE. This product is related to NBS Create 105, 115 & 130

Standard: Approved ceiling installation to Imperial College London Architectural Standards.

Ceiling Type Exposed metal suspended ceilings.

Access Full.

Ceiling Module: 600mm x 600mm.

Suspension system: Burgess 15mm or 24mm wide table exposed interlocking grid system including main tees suspended on rigid hangers at 1200mm centres maximum, 1200mm and 600mm cross tees. Exposed grid table finished to compliment ceiling tile colour finish.

Tiles and acoustic pads: Burgess mild steel electro-plated zinc finish ceiling panels, square edged Type-C, 8mm or 16mm deep can be plain or perforated to D278/D320/S321 to give 22%/14%/14% open area with a 10mm plain border. Complete with a black fleece tissue faced acoustic pad fitted to rear of the metal tile.

Tile Face Size: 575mm x 575mm or 585mm x 585mm x 8mm or 16mm

Colour/Finish RAL9010 polyester powder coated finish with 20% gloss level.