

INTRODUCTION

Background

- High strength-to-weight ratio
- Easy to prefabricate
- Rapid assembly on-site
- Widespread usage from the 1950s

Aims

- Investigation into the benefits gained by using cold-formed steel purlins of yield strength 450 N/mm<sup>2</sup> instead of 390 N/mm<sup>2</sup> which is used in current practice. The degree of moment redistribution at the support is also investigated and a design framework is proposed

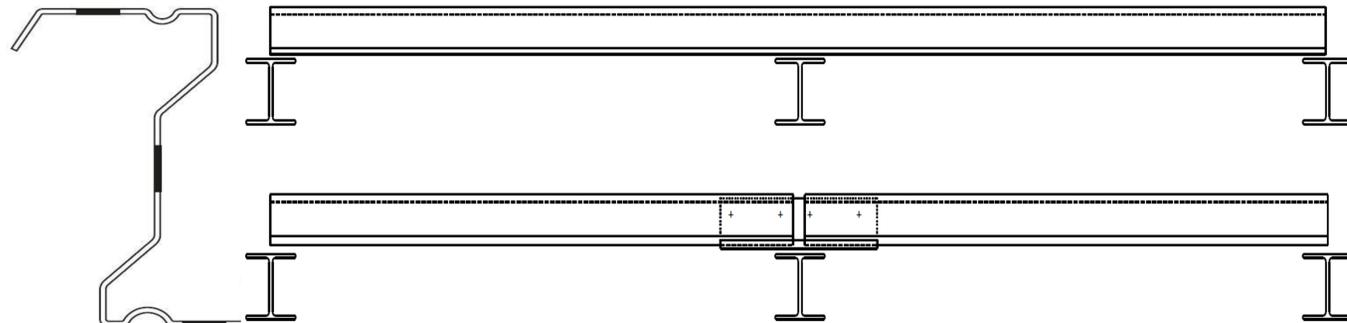


Figure 1: Zeta I purlin

Figure 2: Bare and Sleeved 2-span system

NUMERICAL MODELLING

- Two-stage Ramberg-Osgood model (Gardner and Ashraf) used to model material behaviour of cold-formed steel
- Restraining effects of trapezoidal sheeting incorporated by using a 2-spring model
- Finite strip software CUFSM used to generate geometric imperfections to include in finite element models
- corner properties have been enhanced due to the cold-forming process
- Boundary conditions applied to rigid plates to closely replicate the support cleat
- Pressure load applied to bare system and whiffletree used to applied point loads on sleeved system
- Non-linear springs used to model bolts and SR4 shell elements for the purlins

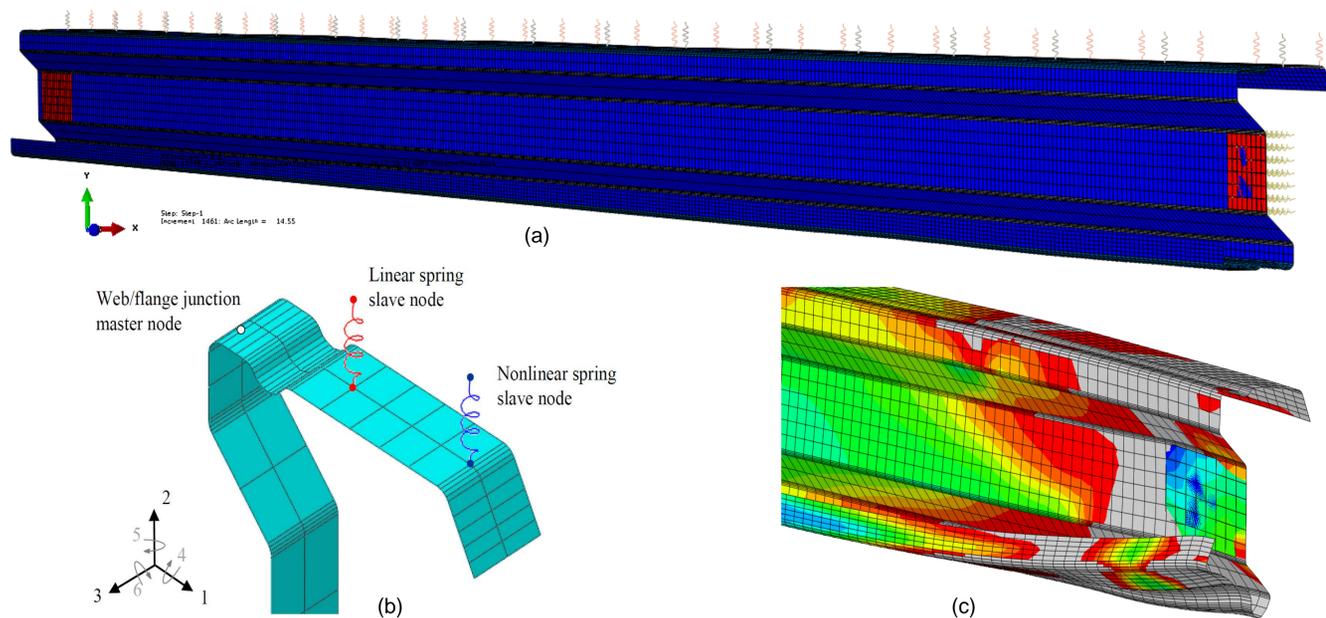


Figure 3: (a) Bare system, (b) 2-spring model and (c) distortional buckling at support

RESULTS

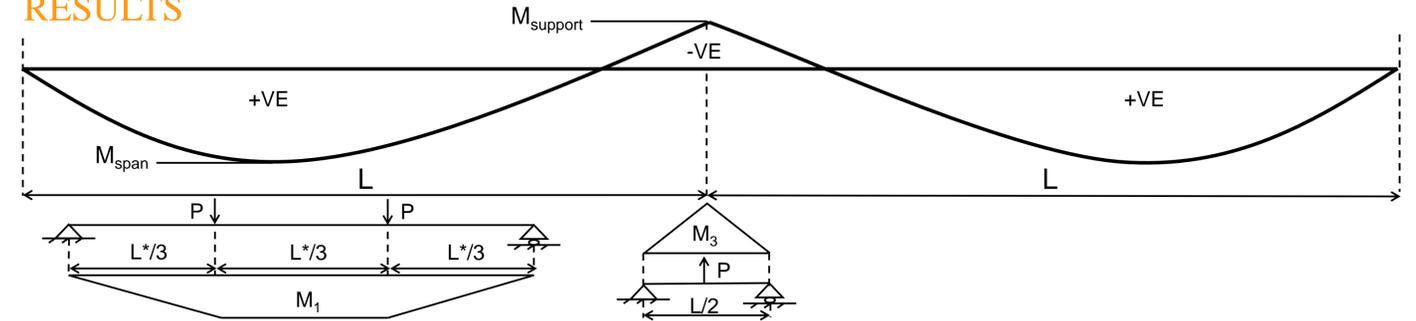


Figure 4: Elastic bending moment diagram

- A drop in moment capacity at the support is observed at the failure load for slender sections. Stocky sections are able to achieve full moment redistribution, without a drop in capacity
- The load carrying capacity of a 2-span system can be predicted by:

$$M_{span} = \frac{(qL^2 - 2M_{support})^2}{8qL^2}$$

where  $M_{span}$  is equal to  $M_1$  and  $M_{support}$  is equal to  $\alpha M_3$

- $\alpha$  is the ratio of reduction in moment capacity at the support section and can be calculated from the formula:

$$\alpha_{design,g} = \left[ 0.7 - 0.0045 \left( \frac{L}{d} \right) \right] \bar{\lambda}_{cs,-ve} \left[ -0.003 \left( \frac{L}{d} \right) - 1.4 \right]$$

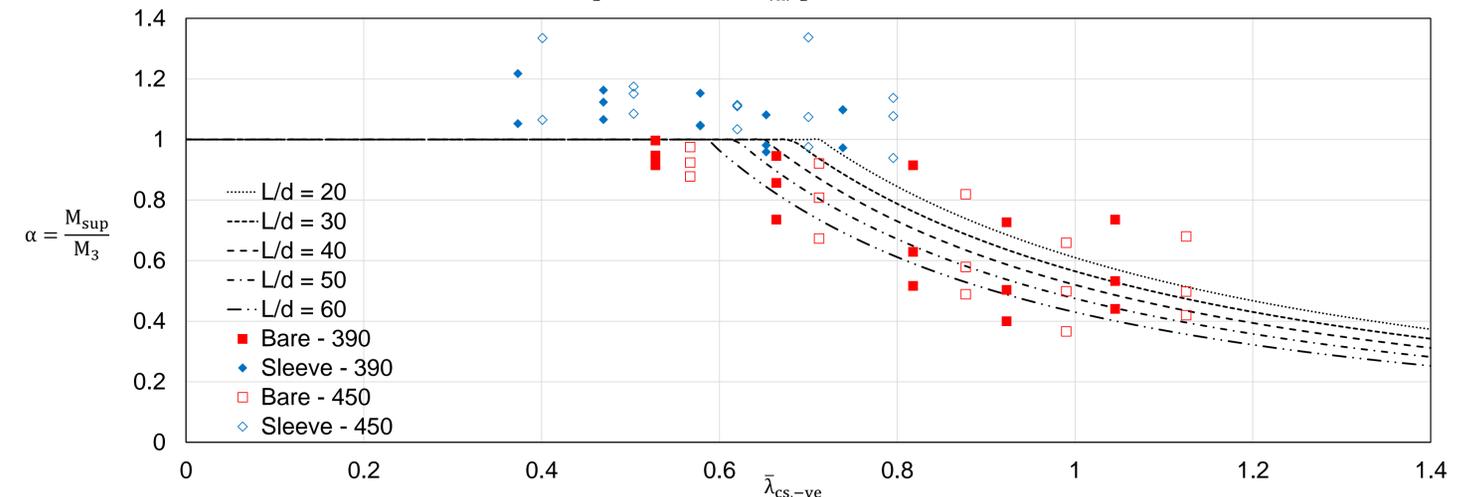


Figure 5: Alpha framework plot for both yield strengths 390 N/mm<sup>2</sup> and 450 N/mm<sup>2</sup>

CONCLUSION

- A good fit was obtained for the design framework, with no significant scatter, therefore the proposed model can be used for both yield strength
- The load carrying capacity of the sleeved system exhibited a 14% increase when compared to its equivalent bare system. This increase corresponded to an increase of 6.22% in material required for the sleeve
- Increase of 11.4% in the ultimate load was attained when yield strength increased from 390 N/mm<sup>2</sup> to 450 N/mm<sup>2</sup>

ACKNOWLEDGEMENTS

I would like to thank Professor Leroy Gardner and Miss. Pinelopi Kyvelou for their continuous support and guidance.

REFERENCES

Nethercot, D.A., Kyvelou, P., Hui, C. & Gardner, L., 2015. The changing basis for the design of cold-formed purlin systems. *8<sup>th</sup> International Conference on Advances in Steel Structures*.  
Gardner, L. & Ashraf, M., 2006. Structural design for non-linear metallic materials. *Engineering Structures*, 28(6), pp.926–934.