

Effect of trailing edge shape on the separated flow characteristics around an airfoil at low Reynolds number: A numerical study

Nikitas Thomareis and George Papadakis

Citation: [Phys. Fluids](#) **29**, 014101 (2017); doi: 10.1063/1.4973811

View online: <http://dx.doi.org/10.1063/1.4973811>

View Table of Contents: <http://aip.scitation.org/toc/phf/29/1>

Published by the [American Institute of Physics](#)

Articles you may be interested in

[Compressibility effects on the flow past a rotating cylinder](#)

[Phys. Fluids](#) **29**, 016101016101 (2017); 10.1063/1.4973564

[Vortex identification from local properties of the vorticity field](#)

[Phys. Fluids](#) **29**, 015101015101 (2017); 10.1063/1.4973243

[Effects of grid geometry on non-equilibrium dissipation in grid turbulence](#)

[Phys. Fluids](#) **29**, 015102015102 (2017); 10.1063/1.4973416

[Scalar mixing and strain dynamics methodologies for PIV/LIF measurements of vortex ring flows](#)

[Phys. Fluids](#) **29**, 013602013602 (2017); 10.1063/1.4973822

Effect of trailing edge shape on the separated flow characteristics around an airfoil at low Reynolds number: A numerical study

Nikitas Thomareis^{a)} and George Papadakis

Department of Aeronautics, Imperial College London, London SW7 2AZ, United Kingdom

(Received 8 July 2016; accepted 26 December 2016; published online 17 January 2017)

Direct numerical simulations of the flow field around a NACA 0012 airfoil at Reynolds number 50 000 and angle of attack 5° with 3 different trailing edge shapes (straight, blunt, and serrated) have been performed. Both time-averaged flow characteristics and the most dominant flow structures and their frequencies are investigated using the dynamic mode decomposition method. It is shown that for the straight trailing edge airfoil, this method can capture the fundamental as well as the subharmonic of the Kelvin-Helmholtz instability that develops naturally in the separating shear layer. The fundamental frequency matches well with relevant data in the literature. The blunt trailing edge results in periodic vortex shedding, with frequency close to the subharmonic of the natural shear layer frequency. The shedding, resulting from a global instability, has an upstream effect and forces the separating shear layer. Due to forcing, the shear layer frequency locks onto the shedding frequency while the natural frequency (and its subharmonic) is suppressed. The presence of serrations in the trailing edge creates a spanwise pressure gradient, which is responsible for the development of a secondary flow pattern in the spanwise direction. This pattern affects the mean flow in the near wake. It can explain an unexpected observation, namely, that the velocity deficit downstream of a trough is smaller than the deficit after a protrusion. Furthermore, the insertion of serrations attenuates the energy of vortex shedding by de-correlating the spanwise coherence of the vortices. This results in weaker forcing of the separating shear layer, and both the subharmonics of the natural frequency and the shedding frequency appear in the spectra. *Published by AIP Publishing.* [<http://dx.doi.org/10.1063/1.4973811>]

I. INTRODUCTION

Performance improvement of lifting devices has always been a challenge for the aerospace industry. Geometric modification of the wing section is one of the most common methods used to attain this goal. The absence of a complicated actuation mechanism has made passive control methods attractive, the most well known and widely used being the extendable flaps and slats employed since the first days of aviation. Since the 1950s, other methods have been studied; for example, the truncation of the rear part of the wing to create a blunt trailing edge,¹ leading to what is known as a flatback profile. These early investigations showed the potential improvement of the maximum lift coefficient for the same flow conditions. More recent investigations have demonstrated additional benefits of the flatback airfoil, both experimentally and numerically,^{2–4} such as increased lift curve slope, optimized structural characteristics, and decreased sensitivity to leading-edge transition. These benefits are important for low to medium Reynolds number applications, such as unmanned air vehicles or small wind turbines.

For small wind turbines in particular, blunt trailing edge airfoils offer significant advantages.² The cyclic gravitational and aerodynamic load results in large bending moments in the inboard region of the blades. This necessitates thick and structurally robust airfoil sections close to the hub, with thickness to

chord ratio larger than 25%. Thick airfoils with sharp trailing edges however have poor aerodynamic characteristics, while blunt trailing edges offer structural benefits without sacrificing the aerodynamic performance.^{2,5}

The exposed blunt part of the airfoil however leads to increased pressure drag due to shedding. For wind turbines, increased drag is not such an important issue for the inboard region of the blade.² Nevertheless, the benefits of blunt airfoils will increase if the penalty of increased drag can be mitigated. Biomimetics inspired several investigators to imitate the serrated geometries observed in animals such as whales or owls. Tanner⁶ used M-shaped serrations at the trailing edge of a blunt profile and found a decrease in the base pressure of up to 64% compared to the straight blunt trailing edge. Gai⁷ found similar results with Tanner and studied the effect of triangular serrations with angles of 60° and 120° , which were also shown to have positive effects. Rodriguez⁸ investigated the effect of squared serrations on a 2D body and found a reduction of up to 40% of the total drag, with an additional study of the longitudinal vortices in the near-wake of the body and their effect on the aerodynamics mechanisms. A more recent work by Krentel and Nitsche⁹ on a truncated NACA 0012 airfoil using various geometrical patterns showed a decrease in the drag by 29% for a specific Reynolds number (44 000). The latest (experimental) study in this area by Nedić and Vassilicos¹⁰ has shown that the effect of serrated trailing edges can be further improved by adding a self-similar repeating (i.e., fractal) pattern in smaller scales. It was shown that the single scale triangular serrations reduced vortex shedding and improved the lift-to-drag ratio for

^{a)} Author to whom correspondence should be addressed. Electronic mail: nikitas.thomareis12@imperial.ac.uk

higher angles of attack, and that the addition of a fractal multi-scale pattern reduced even more the shedding energy without affecting the improved aerodynamic characteristics.

A thorough study on the flow physics behind a bluff body with a sinusoidal trailing edge of constant thickness was made by Tombazis.¹¹ He found that the three-dimensionality effects in the wake can reduce the correlation length of the base pressure, causing a decrease in the pressure drag. Further investigation of the wake of bodies with spanwise undulation^{12,13} showed that the base pressure after the blunt trailing edge can be correlated with the frequencies of the vortex dislocations arising due to the spanwise inhomogeneity of the body. The aforementioned cases of bluff bodies with wavy trailing edges were also studied numerically with similar conclusions.¹⁴

Most of the aforementioned investigations are experimental. As already mentioned, airfoils with modified trailing edges are suitable for low to medium Reynolds number applications for which Direct Numerical Simulation (DNS) is feasible. An important characteristic in the aerodynamic behavior of airfoils at moderate Reynolds numbers is the laminar separation, which occurs shortly after the leading edge of the airfoil, giving rise to a highly complex and dynamic field.¹⁵ The behavior of the separated flow depends on the angle of attack, the Reynolds number, and the type of the airfoil. Kotapati *et al.*¹⁶ distinguish 3 different scenarios: attached flow at small angles of attack (case A), laminar separation, transition, and reattachment (case B), and massively separated post-stall flow at high angles of attack (case C).

Most of the DNS studies of separating and transitional flows however have been performed on planar geometries.^{16–23} The adverse pressure gradient required for the formation of a laminar separation bubble (encountered in real airfoils) is reproduced by a suitable boundary condition at the upper boundary of the computational domain. Several of these studies are concerned with the control of the laminar separation. There are only a few DNS studies on actual airfoils. The latter simulations are more challenging and require curvilinear (or unstructured grids), but are more realistic as the pressure gradient that results from the interaction of the separation bubble with the potential flow around the airfoil and the Kutta condition is part of the solution and not imposed externally.

Shan *et al.*²⁴ performed DNS around a NACA 0012 at 4° and Re based on the chord length equal to 10^5 . The flow at these conditions corresponds to case B scenario. Indeed the authors captured the laminar separation, transition, and reattachment of the shear layer. The shedding from the separated shear layer was attributed to the Kelvin-Helmholtz instability but no characteristic frequency was mentioned. Jones *et al.*²⁵ investigated the effect of forcing on the behaviour of a laminar separation bubble for a NACA 0012 at $Re = 50\,000$ and Mach 0.4. The forcing used in Ref. 25 was a single frequency volume forcing term applied in a predefined region, with an induced spanwise variation. They found that forcing improves the aerodynamic performance, requiring little energy input. A mechanism by which turbulence can sustain itself after the removal of forcing was proposed. Lehmkuhl *et al.*²⁶ investigated the capabilities of two sub-grid scale models

suitable for unstructured grids for predicting the incompressible flow in transitional separating bubbles. A NACA 0012 airfoil with a straight trailing edge was examined. DNS studies at $Re = 50\,000$ were performed at two angles of attack, 5° and 8° , and used as a reference to assess the performance of the sub-grid scale models. Recently, DNS with Reynolds number 400 000 was reported.²⁷

Simulations around airfoils with modified trailing edges are even more rare. Jones and Sandberg²⁸ performed DNS simulations for a NACA 0012 with serrated trailing edge at the same Reynolds and Mach number as their previous investigation for a straight trailing edge.²⁵ A serrated plate with very small and uniform bluntness (equal to 1.2×10^{-3} times the airfoil chord) was appended to the straight trailing edge. Although the main focus of the paper was the study of the acoustic behavior of the airfoil, the analysis of the flow field close to the trailing edge revealed the breakup of large structures from the boundary layer as well as the creation of horseshoe vortices from the serrations. The same authors in another paper²⁹ found that the presence of serrations does not change the hydrodynamic field on the airfoil upstream of the serrations, including the behavior of the laminar separation bubble.

In the present paper, we investigate the effect of trailing edge modifications to the time average as well as the dynamic features of the flow. The central aim is to study the interaction of the separating shear layer with trailing edges of different shapes. We are interested only in the hydrodynamic effect of serrations and not their effect of the acoustic field. The modified trailing edges are obtained by removing material from the main body of the airfoil, thereby exposing a finite bluntness, which is around 30 times larger compared to that of Jones and Sandberg.²⁸ As will be seen later, this difference affects significantly the dynamics of the separating shear layer. We use the Dynamic Mode Decomposition (DMD) to identify the structures generated by the shear layer and the exposed bluntness.

The paper is organized as follows: Section II provides details on the airfoils examined and computational method used; Section III briefly describes the DMD method; Section IV presents the results for the 3 airfoils examined; and Section V summarises the main findings of this work.

II. COMPUTATIONAL SETUP AND VALIDATION

The flow around three airfoils, all based on NACA 0012, was investigated with DNS. The airfoils had different trailing edge shapes: straight, truncated (blunt), and serrated. The airfoil with the straight trailing edge had a standard NACA 0012 cross section. The blunt trailing edge airfoil (also referred to as flatback airfoil below) was formed by truncating the NACA 0012 section at a distance $h = 0.133C$ from the trailing edge of the unmodified airfoil, thus exposing a uniform bluntness of thickness $\epsilon = 0.037C$. The airfoil with the serrated trailing edge is shown in Figure 1(a). The serrations had triangular shape, exposing a bluntness that tapered linearly in the spanwise direction; it was maximum at the trough and zero at the peak. The maximum bluntness was equal to that of the flatback

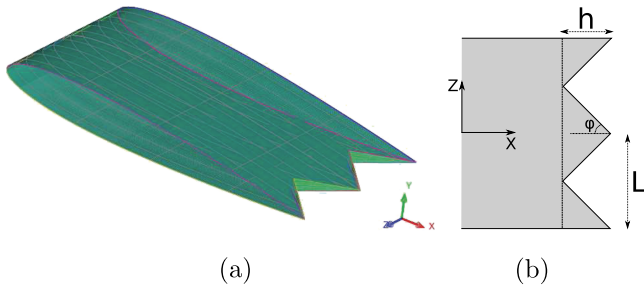


FIG. 1. Serrated trailing edge geometry and characteristic dimensions. (a) Geometry of the airfoil with triangular serrations. (b) Planar view of the trailing edge.

airfoil. A planar view of the trailing edge is shown in Figure 1(b). Three geometric variables define the shape of the serrations: the height (h), the period (L), and the half-angle (ϕ), with values $h = 0.133C$, $L = 0.266C$ and $\phi = 45^\circ$.

For the discretization of the computational domain, a C-grid topology was employed. The X , Y , and Z coordinates are defined as follows: X is the free stream direction, Y is the cross-stream, and Z is the direction along the span of the domain. The origin of the coordinate system is the leading edge of the airfoil.

The chord Reynolds number was $Re_C = 50\,000$ and the angle of attack $\alpha = 5^\circ$. This combination results in laminar separation and turbulent reattachment and enables the study of the effect of the modified trailing edge on the separated flow features and the wake. Unless otherwise stated, frequencies are non-dimensionalised using free stream velocity U_∞ and the chord length C . For the airfoils with the modified trailing edges, the nominal chord length of the standard NACA 0012 profile from which they originate was used as a reference length.

An in-house code, called PantaRhei, was employed for the numerical simulations. The incompressible Navier-Stokes equations

$$\frac{\partial u_i}{\partial t} + \frac{\partial u_j u_i}{\partial x_j} = -\frac{\partial p}{\partial x_i} + \frac{1}{Re_C} \frac{\partial^2 u_i}{\partial x_j^2}, \quad (1)$$

$$\frac{\partial u_i}{\partial x_i} = 0 \quad (2)$$

are solved using the Finite Volume Method (FVM) on a collocated, unstructured grid. The convective terms are approximated with a 2nd order central scheme. For time advancement, the second order backward differencing scheme is used. Viscous terms are treated fully implicitly. The convective terms are linearized by extrapolating u_j from the two previous time steps and treating u_i implicitly. Continuity is enforced via the Pressure Implicit with Splitting Operator (or PISO) algorithm.³⁰ The code is parallelised using the PETSc³¹ library. For the solution of the pressure equation, the GMRES method is

employed together with the BoomerAMG algebraic multigrid preconditioner of the Hypre package.³²

The size of the computational domain in 3D must be large enough to capture the potential flow as accurately as possible, while at the same time minimising the computational expense. The domain of Jones *et al.*²⁵ extends a radius $5.3C$ away from the airfoil and computations in a larger domain with radius $7.3C$ showed a small variation in the pressure distribution. This modest domain size was found to be sufficient to capture the potential flow and this was attributed to the characteristics-based boundary conditions employed. The domain of Shan *et al.*²⁴ extended $3C$ in the upstream and downstream directions and $4C$ in the cross-stream direction; again a compressible flow solver was used with non-reflective boundary conditions in all boundaries. Zhang and Samtaney³³ and Lehmkühl *et al.*²⁶ employed larger domains, with a radius of $10C$ and $20C$, respectively. In the present work, for the straight trailing edge airfoil, 3D simulations in two domains were performed. In the small domain, the inlet boundary is located $6.0C$ upstream of the leading edge, the outlet boundary $4.0C$ downstream of the trailing edge, and the spanwise extent was $L_z = 0.1C$. In the larger domain, the inlet, top, and bottom boundaries are located $18C$ away from the airfoil, the outlet boundary $20C$ downstream of the trailing edge, and the spanwise length is $0.2C$. Comparison between the results obtained from the two domains will be presented later.

For the blunt trailing edge simulations, the spanwise extent was kept at $L_z = 0.2C$ in order to capture the 3D instabilities of the vortices emanating from the sharp trailing edge. These vortices scale with the edge thickness, ϵ , and are expected to develop 3D instabilities at the Re examined. Note that the Re based on ϵ is 1850 , and 3D instabilities develop (at least for the flow around a cylinder) when Re is larger than about 190 .³⁴ There are two types of instabilities (termed modes A and B) that have different spanwise length scales (4ϵ and ϵ , respectively).³⁴ The spanwise extent of $L_z = 0.2C$ is therefore wide enough to accommodate both instabilities. For the serrated trailing edge airfoil, the spanwise distance was two serration periods, i.e., $L_z = 0.532C$.

The top and bottom surfaces were assigned free-slip conditions, while the side boundaries were periodic. The flow velocity was prescribed at the inlet, while at the outlet a one-dimensional convective boundary condition that employs the local cell velocity was used. This boundary condition allows the vortices to exit smoothly the computational domain with minimum reflection.

Grid resolution was very fine close to the airfoil, with 740 nodes around the surface (with appropriate clustering at the suction side to adequately resolve separation, transition, and reattachment), 220 nodes at the wall-normal distance up

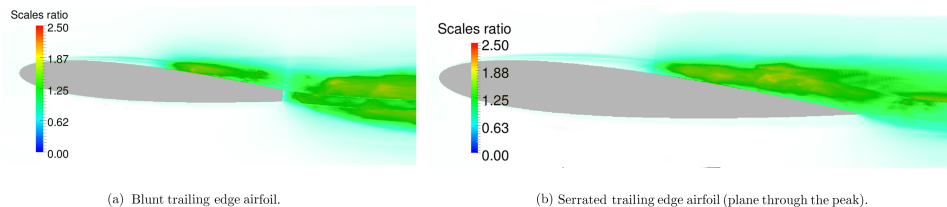


FIG. 2. Contour plots of the ratio of the characteristic grid size to the local Kolmogorov scale.

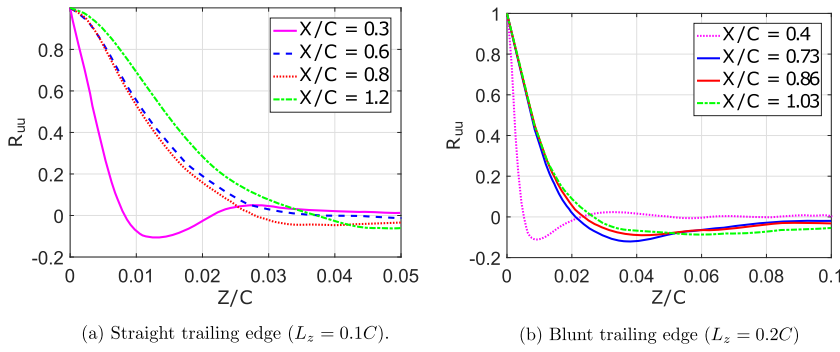


FIG. 3. Spanwise autocorrelation functions for the straight and blunt trailing edge airfoils. The first point is in the separation bubble, the 2nd and 3rd points are in the reattached turbulent boundary layer, and the last points are in the very near wake. The cross stream coordinates of the points are for clarity mentioned here: for (a) $Y/C = 0.038, 0.00037, -0.031, -0.075$ and for (b) $Y/C = 0.025, -0.019, -0.041, -0.062$ going from the first to last point.

to $0.15C$ and 500 nodes at the wake up to $2C$ downstream of the trailing edge. The number of layers along the span varied from 100 (for the straight trailing edge) to 140 (for the serrated trailing edge), leading to a total grid size between 50 and 70×10^6 cells. The resolution in the wall-normal direction is at worse $\Delta y^+ < 1$, while for the streamwise and spanwise directions, it is $\Delta x^+ < 10$, $\Delta z^+ < 10$, respectively. After a statistically steady behavior is reached, data are collected for a period of up to 40 time units (a time unit is defined as $tu = tU_\infty/C$).

In order to assess the suitability of grid resolution for DNS studies, we computed the ratio of the characteristic cell size (defined as the cubic root of the cell volume) to the local Kolmogorov length scale, i.e., $\frac{\sqrt[3]{V}}{\eta}$. Contour plots for this ratio for the blunt trailing edge and the serrated trailing edge airfoil (in a plane through the peak) are shown in Figure 2. It must be mentioned that the cell sizes in the XZ plane are the same for all 3 configurations (there are only minor differences to account for the different trailing edge geometry). As it can be seen, the ratio varies significantly and is maximal in the region of turbulent reattachment and the wake. In the largest part of the domain, the ratio is around 1 (or smaller) and there are very small regions for which the ratio is around 2 or slightly larger (the max value is 2.5). Resolution requirements for a proper DNS have been reported in the work of Moin and Mahesh³⁵ and Donzis *et al.*³⁶ The latter authors mention that a standard resolution for the 2nd order quantities (such as rms velocities or the energy spectrum which takes very small values and falls off rapidly at wavenumbers $k > 1/\eta$) is $\Delta x/\eta \approx 2$. It is expected therefore that the present mesh is sufficiently fine for the results to be true DNS.

In Figure 3, the spanwise autocorrelations of the streamwise velocity, R_{uu} , are shown for the straight (small domain)

and the blunt trailing edge airfoil at 4 points (3 inside the boundary layer and 1 in the near wake). The correlation curves depend on the selected point. The best decorrelation for both airfoils is obtained for the most upstream point, which is located before transition. For the other points, the values reduce to small values at the middle of the domain. Zhang and Samtaney³⁷ computed the spanwise correlations for spanwise domain sizes that range from $0.1C$ to $0.8C$ and found that the results depend not only on the location selected but also on the velocity component examined. In Figure 4 we compare the computed statistics with available results in the literature for the small and large domain for the straight trailing edge airfoil.

The DNS results of Lehmkühl *et al.*²⁶ are ideal for such comparison. Figures 4(a) and 4(b) show the distribution of the pressure C_p and skin-friction C_f coefficients along the airfoil surface for the small and large domains. It can be seen that the effect of the domain size (between the two domains tested) is indeed negligible.

As far as the comparison between the present results and those of Lehmkühl *et al.*²⁶ is concerned, there are some small discrepancies, especially in the C_f coefficient, but overall the matching is reasonably good. The shape of the C_p profiles is very similar to that measured experimentally for laminar separation bubbles with transition followed by reattachment.^{38–40} O'Meara and Mueller³⁸ identify the location of separation as the start of the constant-pressure region (also known as pressure “plateau”), the free shear layer transition point as the end of the “plateau,” and the reattachment as the point at which pressure recovery exhibits a sharp decrease. These observations are broadly consistent with the C_p and C_f plots. The pressure “plateau” appears to start a little downstream of the separation point, while the reattachment point matches with

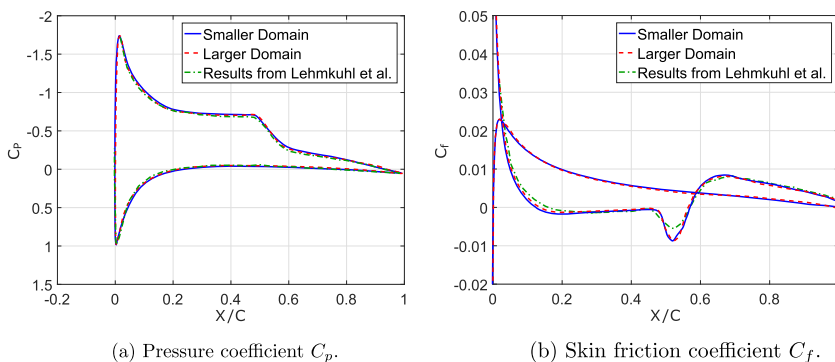


FIG. 4. Comparison between the current results for C_p and C_f coefficients and the DNS results from the work of Lehmkühl *et al.*²⁶

TABLE I. Comparison of time-averaged lift and drag coefficients C_L , C_D and separation and reattachment points X_{sep} , X_{re} .


	X_{sep}	X_{re}	C_L	C_D
Present	0.145C	0.564C	0.589	0.0271
Zhang and Samtaney ³⁷	0.141C	0.58C	0.562	0.0282
Lehmkuhl <i>et al.</i> ²⁶	0.169C	0.566C	0.569	0.0291

the position at which the rate of pressure recovery changes. Inspection of the Reynolds stress distributions (shown in the left column of Figure 10) indicates that transition starts at around $X/C=0.45$, slightly upstream of the end of the pressure “plateau.” The skin friction has very small values inside the recirculation region upstream of transition, which is consistent with the “dead air region” of Horton.⁴¹ Following transition, C_f reaches a minimum negative value, indicative of the “reverse flow vortex.”⁴¹ Increased momentum transfer due to turbulent mixing eventually eliminates the reverse flow and the flow reattaches at $X/C = 0.564$.

The separation and reattachment points as well as the force coefficients computed in the present work are compared with those from two other studies in Table I. There is good agreement with previously reported results. Small discrepancies do exist, but it must be borne in mind that the transition and reattachment locations are very sensitive to the numerical discretisation and mesh resolution. The lift and drag coefficients are also in reasonably good agreement with the results of Lehmkuhl *et al.*²⁶ and Zhang and Samtaney.³⁷

Figures 5(a) and 5(b) show the variation of streamwise velocity and turbulent kinetic energy across the boundary layer at three locations after reattachment (results obtained using the smaller domain). The profiles are compared with those of Lehmkuhl *et al.*²⁶ and again very good agreement is observed.

In Figure 6 instantaneous iso-surfaces of the Q criterion are shown for the visualization of the flow separation and transition. The Q criterion was introduced by Jeong and Hussain⁴² for the visualisation of a vortex and it is defined as $Q = \frac{1}{2}(u_{i,i}^2 - u_{i,j}u_{j,i}) = \frac{1}{2}(\|\Omega\|^2 - \|\mathbf{S}\|^2)$, where Ω and \mathbf{S} are rotation and strain rate tensors, respectively. When $Q > 0$, the rotation rate dominates the strain rate and serves as a way to identify a vortex core. The periodic formation and break up of Kelvin-Helmholtz vortices are clearly seen in the figure. The break up, at this particular time instant, starts to appear clearly at around $x/C = 0.50$, at the end of the pressure “plateau,” and the start of the rapid pressure recovery.

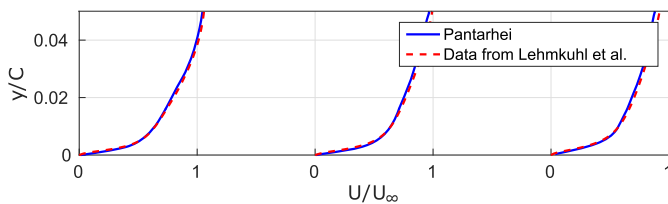

(a) Streamwise velocity profiles at 3 locations (from right to left $X/C = 0.7, 0.8$ and 0.9).

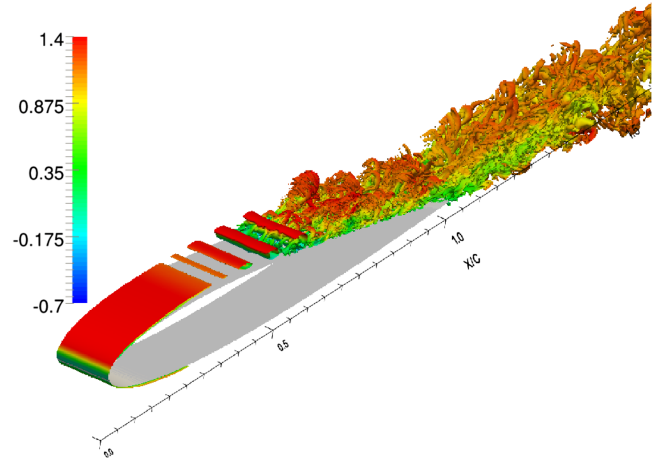



FIG. 6. Q contours in the range $[20, 100] \times (U_\infty/C)^2$ for the straight trailing edge case. The color scale values are based on the streamwise velocity.

III. EXTRACTION OF DOMINANT MODES

Model reduction methods aim at reducing the complexity of flows by extracting and analyzing their most dominant modes (or structures). Proper Orthogonal Decomposition (POD) is the most widely used reduction method.⁴³ POD modes are mutually orthogonal and their amplitudes have multi-frequency content. This indicates that the spatial variation is decoupled from the temporal variation of the modes.

In the current work, we use the Dynamic Mode Decomposition (DMD) method proposed by Schmid.^{44,45} The method provides a set of non-orthogonal modes, each having a characteristic frequency. The temporal and spatial variations are therefore fully coupled. This method is more suitable than POD for the flow fields examined in the present paper, which are characterized by a set of few fundamental frequencies. It is therefore possible to extract directly the structures that oscillate at these frequencies. DMD has already been applied to different flows such as swirling jet⁴⁶ and flows around cylinders of different diameters⁴⁷ or around airfoils.^{48,49} A brief description of the algorithm will be presented below, but for a more rigorous treatment, we refer the reader to the original works of Schmid^{44,45} and the analysis of Jovanović *et al.*⁵⁰ The review paper of Bagheri⁵¹ provides a more general discussion on model reduction methods.

We assume a series of N time snapshots of the velocity field separated by Δt , $\mathbf{X}_1^N = \{\mathbf{v}_1, \mathbf{v}_2, \dots, \mathbf{v}_N\}$. Each vector \mathbf{v}_i is a column with the field data, for example, the u and v

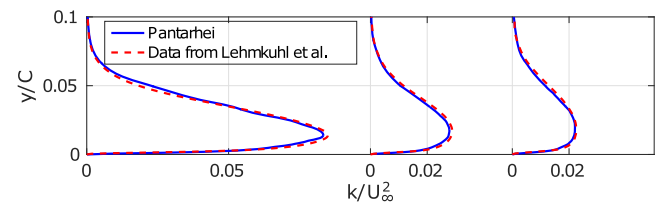

(b) Turbulent kinetic energy profiles at the same X/C locations.

FIG. 5. Comparison of profiles across the boundary layer.

velocity components in a 2D flow. We assume that each vector \mathbf{v}_i has size M , usually $M \gg N$. The method assumes a linear dependence between consecutive snapshots of the form,

$$\mathbf{v}_{i+1} = \mathbf{A}\mathbf{v}_i, \quad (3)$$

where \mathbf{A} is the underlying (unknown) constant system matrix that describes the dynamic behavior of the system. If the differential evolution equation for variable \mathbf{v} is $\frac{d\mathbf{v}}{dt} = \mathbf{B}\mathbf{v}$, then $\mathbf{A} = e^{\mathbf{B}\Delta t}$ and the aim of DMD is to extract the eigenvalues and eigenvectors of matrix \mathbf{B} using the field snapshots. If we define matrix $\mathbf{X}_1^{N-1} = \{\mathbf{v}_1, \mathbf{v}_2, \dots, \mathbf{v}_{N-1}\}$, then because of (3),

$$\mathbf{X}_1^{N-1} = \{\mathbf{v}_1, \mathbf{A}\mathbf{v}_1, \mathbf{A}^2\mathbf{v}_1, \dots, \mathbf{A}^{N-2}\mathbf{v}_1\}. \quad (4)$$

Combining (3) and (4) we get

$$\mathbf{X}_2^N = \mathbf{A}\mathbf{X}_1^{N-1}, \quad (5)$$

where $\mathbf{X}_2^N = \{\mathbf{v}_2, \mathbf{v}_3, \dots, \mathbf{v}_N\}$.

The economy-size SVD (singular value decomposition) of \mathbf{X}_1^{N-1} is $\mathbf{X}_1^{N-1} = \mathbf{U}\Sigma\mathbf{V}^*$ (* denotes the conjugate transpose of a matrix), where Σ is a diagonal ($r \times r$) matrix that contains the r non-zero singular values (i.e., r is the rank of \mathbf{X}_1^{N-1}), and \mathbf{U} and \mathbf{V} are the matrices with ortho-normal columns ($\mathbf{U}^*\mathbf{U} = \mathbf{I}$ and $\mathbf{V}^*\mathbf{V} = \mathbf{I}$) and dimensions $(M \times r)$ and $(r \times N)$, respectively.

If \mathbf{A} is expressed as $\mathbf{A} = \mathbf{U}\mathbf{F}\mathbf{U}^*$, then it can be shown⁵⁰ that matrix $\mathbf{F} = \mathbf{U}^*\mathbf{X}_2^N\mathbf{V}\Sigma^{-1}$ minimises the Frobenius norm $\|\mathbf{X}_2^N - \mathbf{A}\mathbf{X}_1^{N-1}\|_F^2$. The eigenvector ϕ_i of \mathbf{F} is related to the eigenvector \mathbf{y}_i of \mathbf{A} by $\mathbf{y}_i = \mathbf{U}\phi_i$. The reconstructed flow field $\tilde{\mathbf{v}}_j$ ($j = 1 \dots N - 1$) is given by

$$\tilde{\mathbf{v}}_j = \sum_{i=1}^r \mathbf{y}_i (\lambda_i)^j \alpha_i, \quad (6)$$

where α_i is the amplitude of the i th mode and λ_i the corresponding eigenvalue of \mathbf{F} . In order to compute the amplitudes, a second optimization problem is solved.⁵⁰

When applied to a linear system, Equation (3) is exact. In this case, the computed modes/eigenvalues represent the physically correct structures and their growth rates, frequencies. For non-linear systems, (3) represents a best linear map that links all snapshots. If the flow is characterized by periodically repeatable and persistent (i.e., neutrally stable) structures, the DMD method should be able to detect these and the

associated frequencies. For these structures, the growth rate (i.e., the magnitude of λ) should be very close to 1, which indicates that they are neutral. A large value of the amplitude, α_i , is not a reliable indicator for the selection of such structures, as it may characterise a mode that will eventually decay. For this reason, the amplitudes α_i are multiplied by $(\lambda_i)^{N-1}$, so that the modes with high α_i but $|\lambda_i| < 1$ (i.e., higher damping ratios) are not prominent.

IV. RESULTS AND DISCUSSION

In this section, results are presented starting with the straight trailing edge, followed by the flatback and ending with the serrated edge. This order of exposition helps understand better the process of interaction of the trailing edge with the separating shear layer.

A. Airfoil with straight trailing edge

The DMD method was applied on a Z plane at the mid span, in an X - Y window with dimensions $[-0.2, 2] \times [-0.27, 0.18]$ C . In total $N = 300$ time snapshots separated by $\Delta T = 0.01^C/U_\infty$ were used, which corresponds to approximately 12 shedding cycles. A polar plot of the computed eigenvalues is shown in Figure 7(a). The modes appear in complex conjugate pairs and the ones with the largest amplitude $\alpha_i(\lambda_i)^{N-1}$ are marked with yellow colour. Two dominant modes can be identified from the DMD spectrum shown in Figure 7(b): a low frequency mode located at $f_1 = 3.8$ and a high frequency at $f_2 = 7.4$.

In order to verify that these frequencies are indeed present and they are dominant, velocity time-signals from two different locations at the mid span were analysed: one on the suction side of the airfoil at $X/C = 0.53$, $Y/C = 0.032$ (inside the transitioning shear layer but upstream of reattachment) and one in the wake at $X/C = 2.0$, $Y/C = -0.17$. In Figures 8(a) and 8(b) the power spectral density of the cross-stream velocity is plotted. The velocity signal at the first point (Fig. 8(a)) shows a peak at the high frequency f_2 observed in Figure 7(b). Note that in Figure 8(a) the horizontal axis is linear and replotting using logarithmic axis (figure not shown) reveals that the energy content of the signal is distributed among a range of frequencies, centered around a broad peak at frequency f_2 . Such a broad peak has also been observed experimentally^{39,52} and is due to the fact that the shear layer amplifies a broad

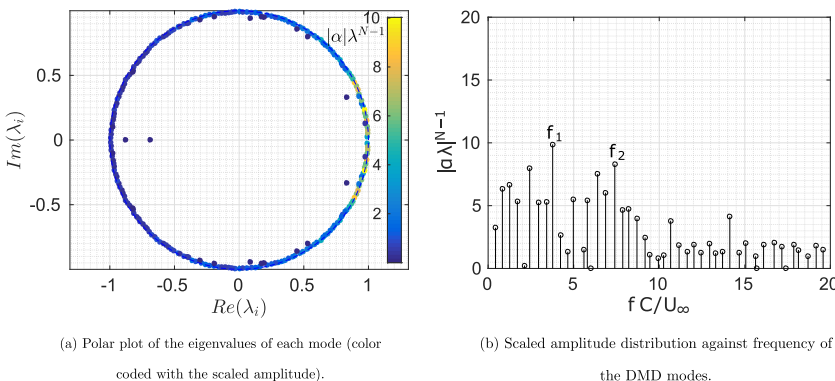


FIG. 7. Amplitude distribution of the eigenvalues calculated from the DMD algorithm.

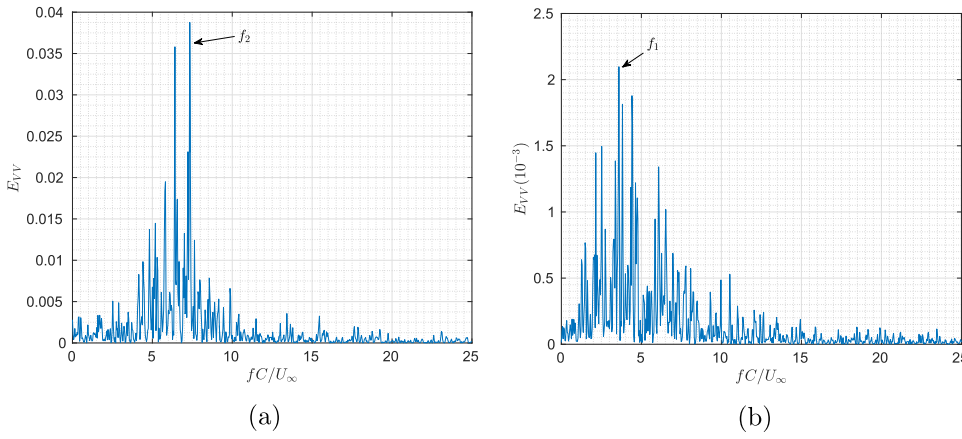


FIG. 8. Power spectral density spectrum of the cross stream velocity component V at two different locations, $X/C = 0.53C$, $Y/C = 0.032$ (a) and $X/C = 2.0C$, $Y/C = -0.17$ (b).

range of frequencies.⁵³ Similarly, the velocity signal at $X/C = 2.0$ (Figure 8(b)) shows a dominant peak located at the lower frequency f_1 ; again this is a broad peak due to the fact that the point is immersed in a turbulent wake.

The spatial structure of the two most dominant modes as well as the time averaged streamwise velocity field is depicted in Figure 9. In the time averaged field, shown in Figure 9(a), a thin recirculation zone can be clearly seen on the suction side of the airfoil. The high frequency, $f_2 = 7.4$, is associated with the Kelvin-Helmholtz instability triggered by the inflectional velocity profile across the separating shear layer.⁵⁴ As Figure 9(b) shows, this mode is dominant in the separating shear layer, approximately between $X/C = 0.4-0.8$. In the region where it is most dominant, the shear layer rolls up and sheds vortices, as shown in Fig. 6.

It is difficult to compare directly this frequency against results from the literature because the flow conditions are different. For example, Jones⁵⁵ performed one-dimensional spatial stability analysis on a number of time-averaged velocity profiles along the suction side for the same airfoil, angle of attack, and Reynolds number, but with Mach number equal to 0.4, which makes compressibility effects non-negligible. The frequency with the strongest spatial growth slightly changes from one profile to the other, but overall the most amplified frequency in the shear layer was found to be $f = 8.49$, which is close to the present f_2 . The difference can be attributed to two reasons: first, Jones's analysis is one-dimensional and is based on the Orr-Sommerfeld equation and, second, compressibility effects are expected to become more important in the area of high acceleration around the leading edge and therefore affect the velocity distribution of the separating shear layer and the most amplified frequencies. Boutilier and Yarusevych³⁹ examined the flow around a NACA 0018 at $Re = 100\,000$ and they also performed one-dimensional stability analysis using the measured time-averaged profiles. For the 5° angle of attack, the dominant frequency was found to be 13.0 (Table II in their paper). The difference with the present work can be attributed to the different Reynolds number (there is a power law dependency of the shear layer frequency and Reynolds number)⁴⁰ and the different thickness of the airfoil that affects the velocity distribution in the suction side.

The predicted frequency, f_2 , however is in agreement with previous results when non-dimensionalized with the appropriate length and velocity scales. Huang and Ho⁵⁶ and Yarusevych

*et al.*⁵² have identified the streamwise distance of the shed vortices, ψ_0 , and the velocity at the edge of the boundary layer at the point of separation, U_{es} , as the relevant length and velocity scales, respectively. The distance ψ_0 can be directly estimated from the spatial structure of the DMD mode (Figure 9(b)) and it is found to be $\psi_0 \approx 0.08C$, while $U_{es} = 1.4U_\infty$. The corresponding non-dimensional frequency is $f_2^* = f_2\psi_0/U_{es} \approx 0.44$, very close to the observed range of values 0.45–0.5.⁵²

It is known that as the amplitude of the perturbation grows spatially, non-linear interactions result in a lower frequency, which is a subharmonic of the fundamental instability frequency (for which the mechanism of the generation of the subharmonic refers to the review paper of Ho and Huerre⁵³ and references therein). The DMD method captures a low frequency at $f_1 = 3.8$. The footprint of this frequency is shown in Figure 9(c). The mode is activated at $x \approx 0.45C$ (slightly downstream compared with the high frequency mode) and is seen to be present in the reattaching shear layer and the near wake, before decaying slowly further downstream. This frequency

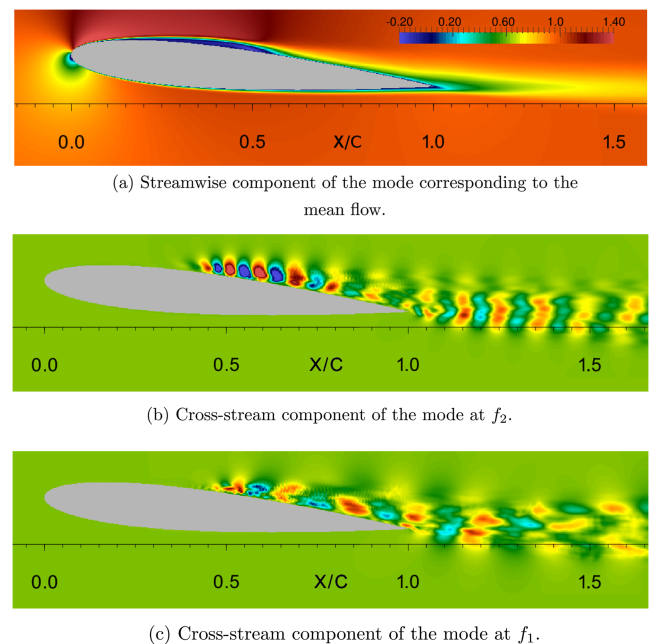


FIG. 9. Time-averaged streamwise velocity field (a) and two most dominant DMD modes for a straight trailing edge (b) and (c).

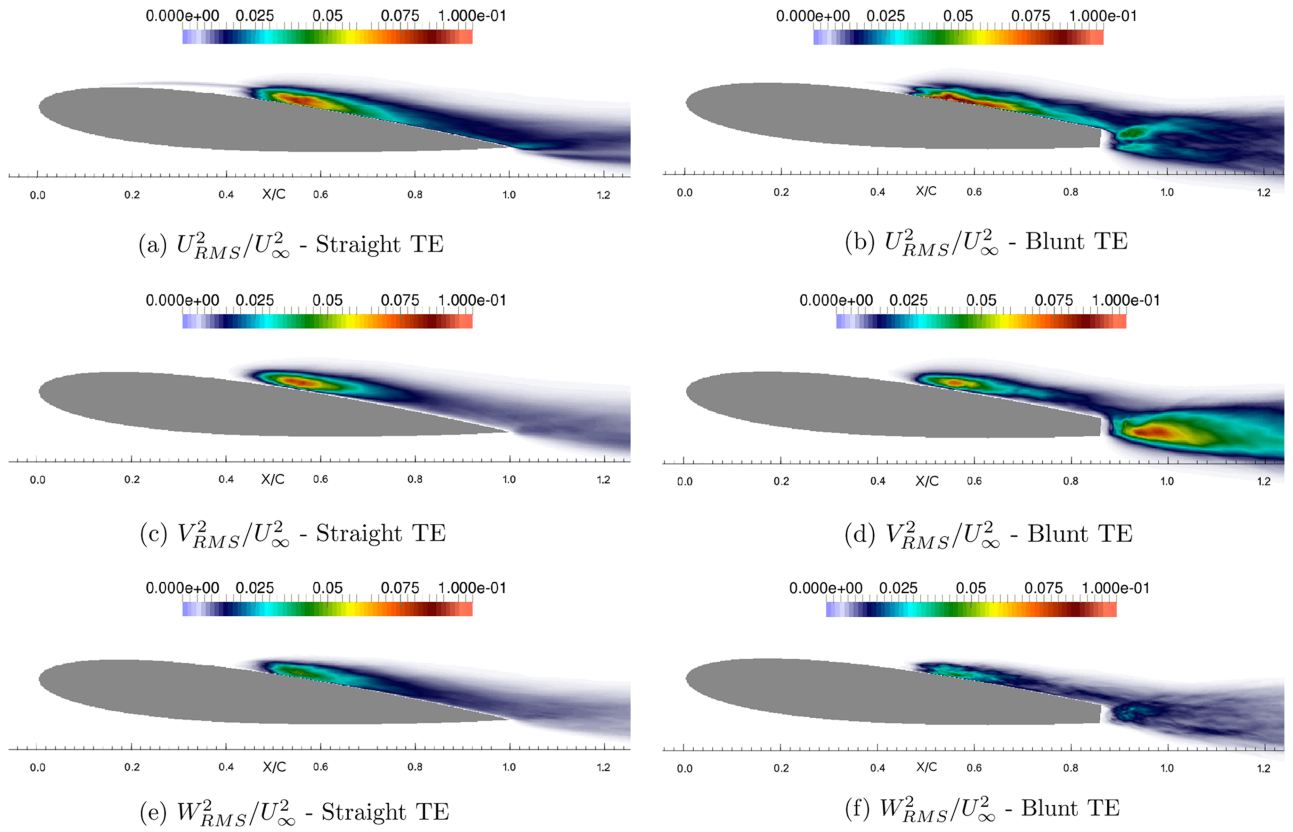


FIG. 10. Streamwise, cross-stream, and spanwise Reynolds stress distributions for the straight and blunt trailing edge airfoils.

is indeed very close to the subharmonic of the fundamental frequency $f_2/2 = 3.7$ (the difference is 2.7%).

In the left column of Figure 10, contour plots of the three normal components of the Reynolds stresses are shown. The same color scale is used to facilitate comparison of the plots. Rapid growth of fluctuations starts at about $X/C = 0.45$ indicating transition to turbulence, as already mentioned. Shortly afterwards are the location of the start of rapid pressure recovery shown in the C_p plot (Figure 4(a)) and the location of the minimum value of the skin friction (Figure 4(b)). Close to the reattachment point ($X/C = 0.56$), all three normal components attain very large values. After the peak, the Reynolds stresses decay downstream. Note also that strong spanwise velocity

fluctuations appear denoting the rapid 3D breakdown of the vortices. Two dimensional simulations for this Reynolds number and angle of attack therefore do not describe accurately the flow.

B. Airfoil with blunt trailing edge

The DMD method was applied again on the mid-span plane in the same X - Y window as in the straight trailing edge case, i.e., $[-0.2, 2] \times [-0.27, 0.18] C$. In total, 240 time snapshots, separated by $\Delta T = 0.01 C/U_\infty$, were used, which correspond to 11 shedding cycles. The DMD spectrum in this window is shown in Figure 11. One very dominant frequency appears at $f_{bl,1} = 4.5$. Its first harmonic at $f_{bl,3} = 2f_{bl,1}$ also appears. The shear layer natural frequency identified previously is still present at $f_{bl,2} = 7.5$, albeit highly attenuated.

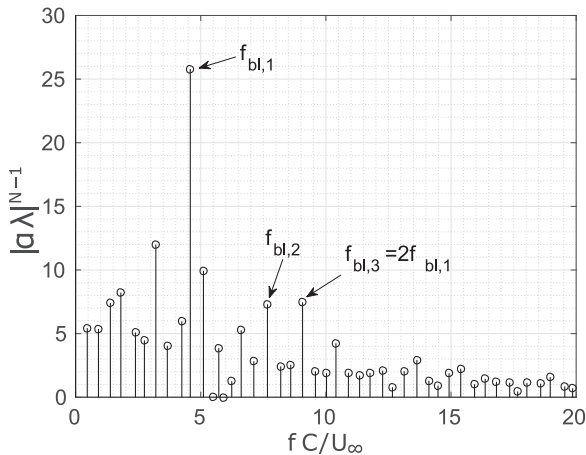
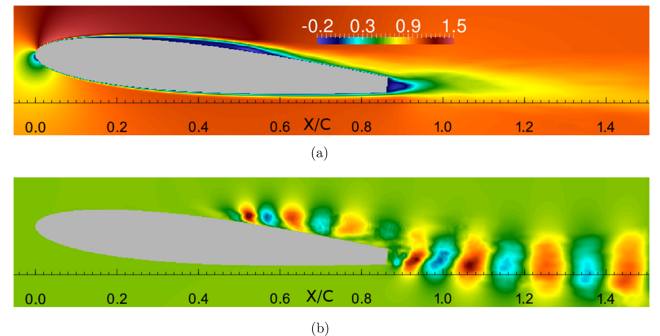


FIG. 11. DMD spectrum of the flow field around the blunt trailing edge airfoil.

FIG. 12. Contour plots of the time-averaged velocity field U/U_∞ (a) and the most dominant flow mode (b) at $f_{bl,1}$.

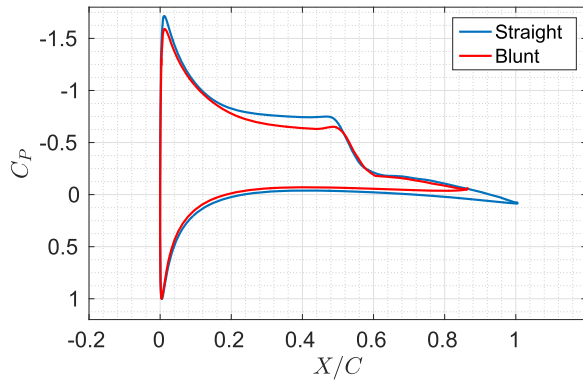


FIG. 13. Comparison of the pressure coefficients for the straight and blunt trailing edge cases.

It is clear that the truncation of the trailing edge affects significantly the separating shear flow and its frequency content; this interaction will be examined in more detail below.

In Figure 12(a), contour plots of time-averaged streamwise velocity are shown. The flow in the suction side is qualitatively similar compared to the straight trailing edge airfoil: laminar separation, transition to turbulence, and reattachment. The locations of the separation and reattachment points are however different (at $0.23c$ and $0.58c$ respectively compared to $0.165c$ and $0.56c$ for the straight trailing edge) leading to a net reduction of the recirculation zone size. The most striking difference in the mean flows between the two airfoils is in the near wake: the presence of bluntness creates a small recirculation zone, which is absent in the straight airfoil case.

Inspection of Figure 13 demonstrates that the pressure distribution in the separating shear layer is also different. The

minimum C_p is -1.72 for the straight trailing edge, and -1.59 for the blunt trailing edge. To identify the origin of this difference, potential flow simulations with Xfoil⁵⁷ were performed and exactly the same behavior was observed; the origin therefore is inviscid. This difference has been also observed in the past by Chen and Agarwal⁵⁸ and it is a direct effect of the truncation of the trailing edge, which increases the radius of curvature of the leading edge in relation to the chord length.

Coherent structures originating from the truncated part of the airfoil are clearly illustrated in Figure 12(b). This mode, corresponding to the frequency peak $f_{bl,1} = 4.5$, is a characteristic of bluff body von Karman vortex shedding. Well-organized structures are shed from the truncated part of the airfoil and convect downstream without significant attenuation, at least in the current field of view. The Strouhal number of this mode based on the trailing edge bluntness and the free stream velocity is $St_{bl,1} = 0.17$. The Strouhal number measured by Nédic and Vassilicos¹⁰ was 0.189 for an identical geometry but with the chord based Reynolds number three times higher ($Re = 150\,000$) and without laminar separation (both boundary layers were tripped). Krentel and Nitsche⁹ found the shedding Strouhal number to be 0.2, but the Reynolds number based on the trailing edge thickness was 44 000, more than an order of magnitude higher compared to the one in the present paper (1850). Although this mode has the strongest presence in the wake, its footprint extends far upstream in the suction side of the airfoil, as can be seen in Figure 12(b). This is not surprising. The wake shedding is the result of a global flow instability and therefore present in the whole flow field. This wake mode is therefore partially collocated with the separating shear layer and provides an excitation (forcing) to it. This has important implications as will be discussed below.

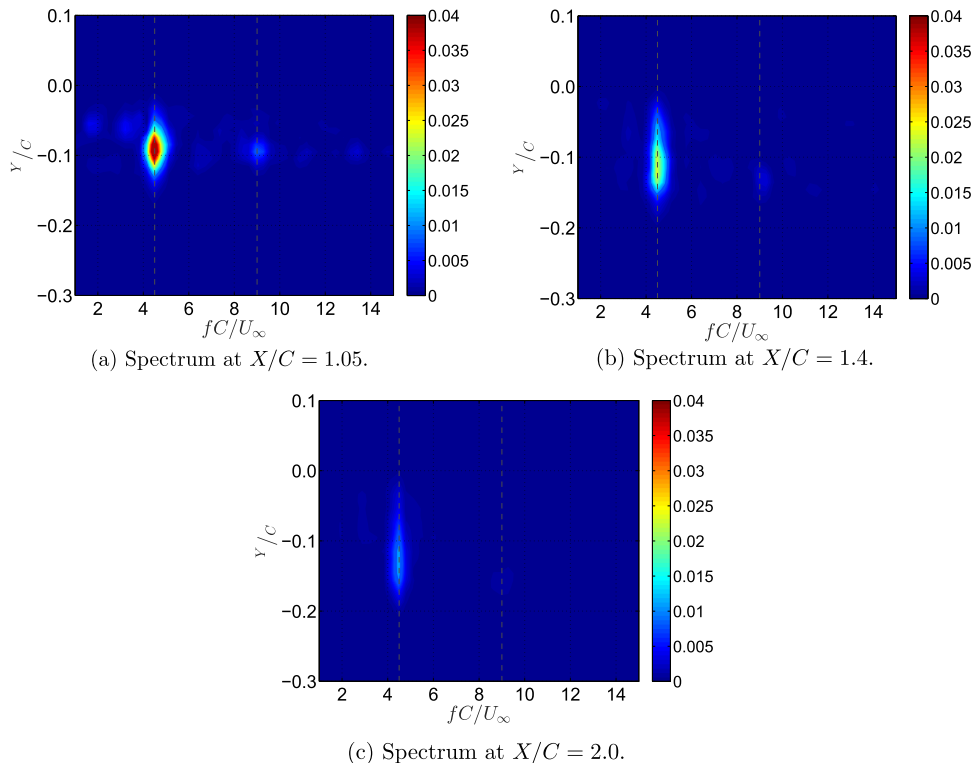


FIG. 14. Spectra for the blunt trailing edge airfoil for different cross streams ($Y/C [-0.3, 0.1]$) and streamwise ($X/C = 1.05, 1.4, 2.0$) locations.

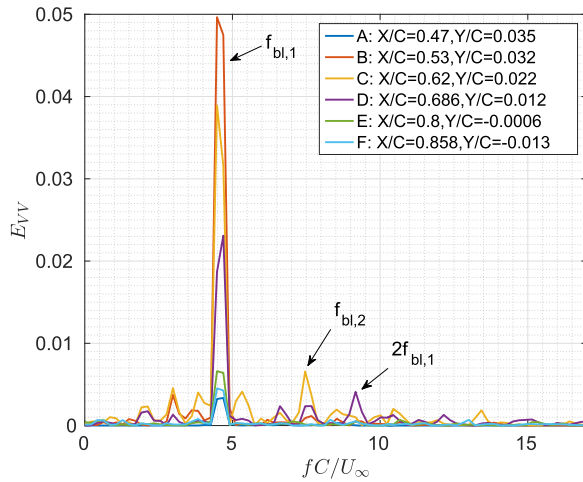


FIG. 15. Cross stream velocity spectra for 6 different locations at the suction side boundary layer, starting from $X/C = 0.47$ up to $X/C = 0.87$.

In order to confirm the dominance of the peaks identified in the DMD spectrum, Fourier analysis of the time signals from various probe points in the wake and the suction boundary layer was performed. In Figure 14, contour plots of the Power Spectral Density (PSD) of the cross-stream velocity spectra are plotted for three different streamwise locations. A strong peak can be identified at $f_{bl,1} = 4.5$, along with a weaker peak at the first harmonic $2f_{bl,1}$. These peaks are observed behind the trailing edge, and they are elongated in the Y direction and are strongest close to the airfoil and attenuate downstream.

In Figure 15, the spectra at 6 points in the suction side boundary layer are plotted. A clear peak can be observed again at $f_{bl,1}$ at all locations. The maximum amplitude appears at Point B, inside the transitioning shear layer.

Both DMD and the spectra reveal a pronounced peak associated with the shedding frequency and its harmonic. A third peak, with relatively reduced amplitude, can be observed in Figures 11 and 15 at frequency $f_{bl,2} = 7.5$. This peak is very close to the frequency $f_2 = 7.4$ of the straight trailing edge case and corresponds to the natural shear layer instability. Indeed, if the appropriate as before length and velocity scales are used, which for the blunt airfoil are $\psi_0 \approx 0.075C$ and $U_{es} = 1.34U_\infty$, respectively, the corresponding non-dimensional frequency $f^* = f_{bl,2}\psi_0/U_{es} \approx 0.42$, which is again close, albeit slightly below, to the range of observed values.⁴⁰ Despite the presence of the natural instability, the shedding mode at $f_{bl,1} = 4.5$ is significantly more dominant, both in the DMD spectrum (Figure 11) and in the point spectra in the wake and suction sides of the airfoil (Figures 14 and 15, respectively).

In order to investigate in more detail the behavior of the separating shear layer, the DMD method was applied on a smaller window on the suction side of the airfoil (see Figure 16(b)). The corresponding spectrum is shown in Figure 16(a). Peaks at the same frequencies as in the spectrum of Figure 11 can be identified. The spatial structure of the mode corresponding to the peak at $f_{bl,1}$ is shown in Figure 16(b). Distinct vortices originating from the separated shear layer can be identified. It appears that the trailing edge shedding affects the response of the shear layer, by forcing it to oscillate and release vortical structures, at the same frequency. In other words, the shear layer is now locked to the shedding.

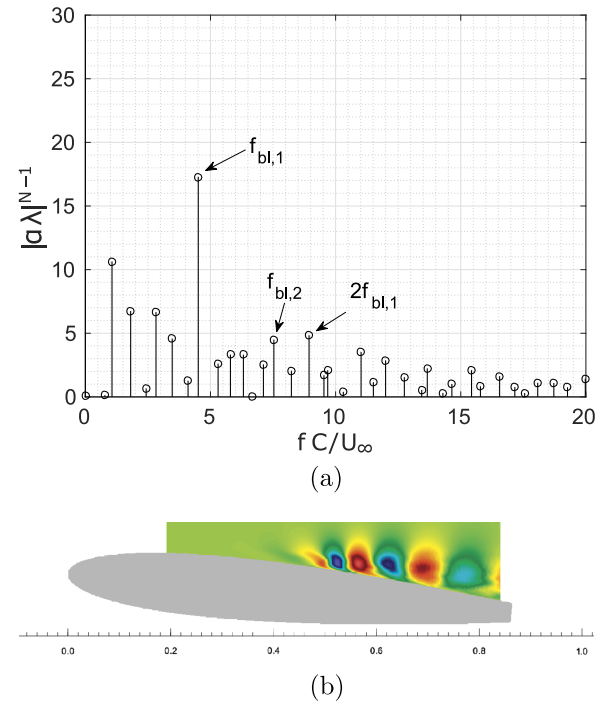


FIG. 16. DMD spectrum (a) and spatial structure of the mode at $f_{bl,1}$ (b) at the plane capturing the shear layer transition and reattachment. The cross-stream component of the mode is plotted.

Previous works in the literature have examined the effect of forcing in the characteristics of separating shear layers but with an entirely different objective, namely, that of control of separation. Marxen and Rist¹⁸ looked at the mean flow deformation of a laminar separation bubble that develops in a flat plate due to harmonic forcing upstream of the bubble. They noticed a reduction in the size of the bubble and a stabilisation of the flow with respect to small linear perturbations. Similar were the findings of Rist and Augustin.¹⁹ Greenblatt and Wygnanski⁵⁹ have written an extensive review on the subject. The difference with the present work is that periodic perturbations aiming at separation control are imposed externally and upstream of the separation bubble. In our case, however, they appear naturally due to the vortex shedding from the blunt trailing edge, they are strongest in the near wake, but they have strong upstream influence.

The response of a free shear layer to external forcing has been studied by Ho and Huang,⁶⁰ where it was found that the shear layer showed different states of lock-in depending on the ratio f_f/f_n , where f_f is the frequency of the external forcing and f_n the natural frequency of the shear layer. For our case, this ratio is $4.5/7.5 = 0.6$, i.e., the forcing frequency is close to the subharmonic. Ho and Huang⁶⁰ have shown that this ratio is well within the region where the frequency response of the shear layer is expected to be the same as the forcing frequency. This is exactly what we find in our simulations.

Vortex shedding has also appeared in many experiments; however, the ratio of the shear layer frequency to the vortex shedding frequency is quite large. For example, in the experiments of Yarusevych *et al.*,⁵² for the range of Reynolds numbers for which reattachment occurred, this ratio was at least 7. There is one study in which these two frequencies are similar to that of Kotapati *et al.*¹⁶ The authors studied a flow

configuration with laminar separation, reattachment, and vortex shedding. There are however some important differences compared to our case: first, instead of an airfoil, they examined a flat plate with elliptic leading edge and a blunt trailing edge (with thickness 5% of the chord) at zero incidence and second, they induced the laminar separation bubble close to the trailing edge, in the aft one-third of the flat plate. They report a shear layer instability frequency equal to 7.3 (surprisingly close to ours) and a vortex shedding frequency of 5.0 (obtained when there was no separation bubble, again not far from ours). Their 2D simulations showed that the shear frequency and the shedding locked to a single frequency of 2.9, while we find locking at a larger frequency (equal to 4.5). The explanation for this difference is the following: the authors induced the separation bubble close to the trailing edge (the reattachment point is located at $0.97C$); therefore, the effective length scale for the vortex shedding (in essence, the effective thickness seen by the flow) is the sum of the plate thickness and the height of the separating bubble¹⁶ (equal to $0.037C$ and located at around $0.88C$, as can be observed from their Figure 5). In our case the separation bubble appears in the middle of the airfoil, the flow reattaches at $0.56C$, and so the thickness of the bubble does not affect the effective length scale of shedding. In order to confirm that this is indeed the case, we performed an additional DNS simulation in which the boundary layer was tripped numerically at the region $X/C = 0.03$ – 0.04 . The tripping resulted in a quick transition to an attached turbulent boundary layer on the suction side of the airfoil, and the shedding frequency was also 4.5. This confirms that the presence of separation bubble does not affect the shedding frequency, and the latter is due only to the bluntness. The shear layer then locks to the externally imposed frequency and that frequency depends only on the thickness of the trailing edge.

There is one more aspect that needs clarification: Why the shear layer and shedding frequencies are similar, while in the other studies (excluding that of Kotapati *et al.*), the ratio is significantly higher, as already mentioned? The answer lies in the different length scales that generate the vortex shedding and in the particular value of the Reynolds number examined. More specifically, in the present case, the characteristic length scale for the shedding is the trailing edge bluntness and not the thickness of body (as is, for example, in a thick NACA 0025 airfoil⁵² or in a cylinder³⁴); this has important implications for the shedding frequency. Reducing the characteristic length scale increases the frequency (in order to keep the Strouhal number constant and relatively independent of the Reynolds number). In our case, the ratio of the trailing edge thickness to that of the airfoil is $\epsilon/t = 0.31$ resulting in a significant larger frequency, close to the subharmonic of the natural shear layer frequency. The latter has a power-law dependency on the Reynolds number⁵² and, for the particular Re examined, it attains the value of 7.5, as already mentioned.

The Reynolds stress distributions are shown in the right column of Figure 10. The same scale is used for the straight and flatback airfoil. Significant differences are noticed, especially in the near wake. As expected for the flatback airfoil, the Reynolds stress distributions are similar to those created due to vortex shedding behind bluff-bodies. More specifically, the streamwise stress component, U_{RMS}^2 , has two peaks close to

the top and bottom edges of the blunt trailing edge (confirming that this is the correct length scale to use for the Strouhal number), while a single strong peak appears for the cross-stream component V_{RMS} . Both are results of the periodic formation and detachment of vortices from the top and bottom of the surface of the exposed bluntness. A wider area of spanwise fluctuations, W_{RMS}^2 , is also observed, which is a direct effect of the wider wake due to the Kármán shedding.

C. Airfoil with serrated trailing edge

The effect of adding the serrated trailing edge on the flow field will be examined in this section. As it will be shown, the flow field in this case is characterized by a three dimensional, secondary flow.

Attention is focused first on the characterisation of the spanwise inhomogeneity of the time-average flow. The streamwise flow fields at two planes (through the peak and the trough) are shown in Figure 17. The flow patterns in these two planes resemble the patterns around a straight and blunt trailing edge, respectively.

Although not immediately evident from Figure 17 because of the color scale used, close examination of the velocity field in the near wake reveals an unexpected behaviour. Figure 18 shows profiles of velocity magnitude at 4 positions at the same streamwise distance ΔX from the trough and the peak locations. It can be clearly seen that the velocity deficits at the same distance from the airfoil surface are different. Most importantly, the wake deficit downstream of the peak is higher than the deficit downstream of a trough. At the location closest to the trailing edge, at $\Delta X = 0.1C$, the deficit after the peak is approximately 20% higher compared to the deficit after the trough. As ΔX increases, the relative difference diminishes and spanwise homogeneity is observed approximately one chord length downstream of the trailing edge. Due to the presence of bluntness at the trough base, one would expect a higher deficit downstream of the trough, and not the peak, at the same distance from the airfoil. This flow characteristic of the serrated

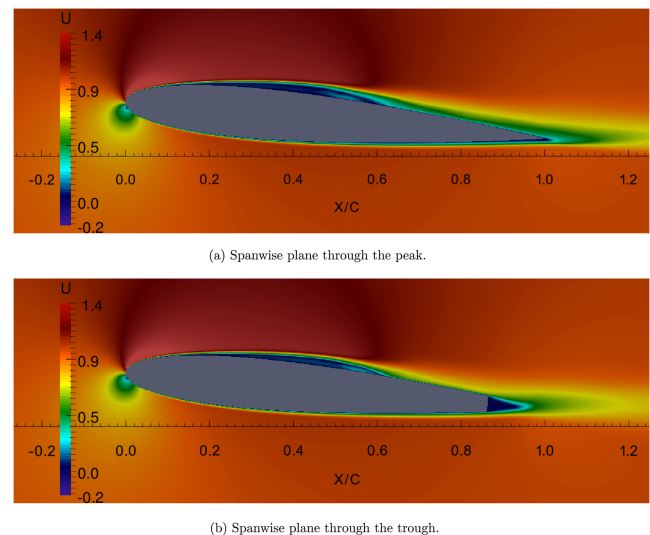


FIG. 17. Time-average streamwise flow fields through the peak and trough planes.

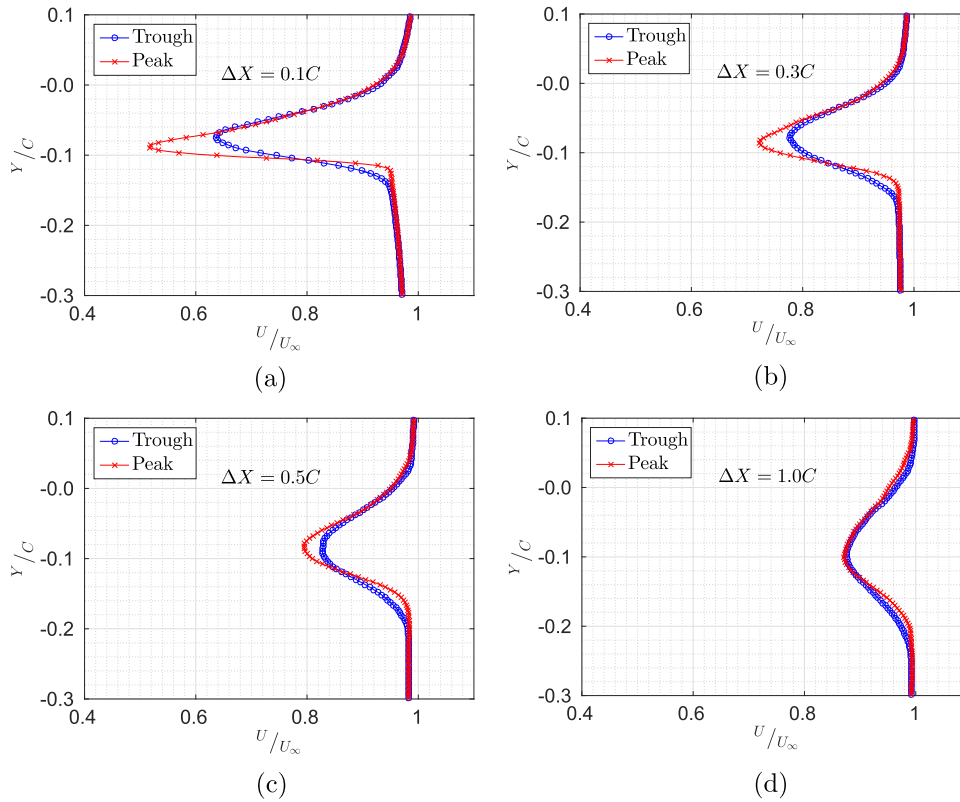


FIG. 18. Streamwise velocity profile at 4 different positions located at distance ΔX downstream of the trailing edge (ΔX is measured locally along the X direction from the trough and the peak spanwise locations).

trailing edge has also been observed experimentally by Prigent *et al.*⁶¹

In order to explain the flow acceleration behind the trough, we examine first the spanwise variation of the pressure distribution. Figure 19(a) depicts the surface pressure distribution through the trough and the peak planes. It is clear that the pressure distribution is almost identical in the pressure and the suction side, with only small differences in the separating shear layer. The trailing edges however experience a significant pressure difference. The static pressure at the peak is larger compared to the trough by about 10% of the dynamic pressure ($\frac{1}{2}\rho U_\infty^2$). The reason for this pressure difference in the spanwise direction is not difficult to explain: after reattachment, the turbulent flow at the peak plane can recover pressure along a larger distance, thereby reaching higher pressure at the trailing edge peak compared to the trough. Pressure varies also slightly inside the trough gaps (by less than 2% of dynamic pressure), as shown in Figure 19(b).

This spanwise pressure difference is responsible for the development of a secondary flow pattern. More specifically,

the spanwise pressure gradient creates an undulating spanwise velocity component, W , as shown in Figure 20(a). This velocity component is equal to 0 at the trough and peak locations (denoted by the dashed lines in Figure 20(a)) and is maximized in the area in-between. Its value at the specific streamwise location shown is small, but close to the trailing edge increases, causing the time-averaged streamlines to bend towards the serration troughs, as illustrated in Figure 20(b).

A three dimensional view of the time-averaged streamlines close to the trailing edge is shown in Figure 21. The lines are color-coded with the streamwise velocity. The starting points for the generation of streamlines are placed at the pressure side of the airfoil. The streamlines are reminiscent of the flow generated from the wing tip vortices of a finite wing. The low base pressure (due to the finite bluntness) creates a recirculating pattern along the tip of the serration. The presence of the spanwise pressure variation and the W velocity component results in streamlines that spiral around the recirculation, transporting fluid from the peak to the trough. By virtue of the mass conservation, the flow in the trough is accelerated, thereby providing the mechanism that explains the aforementioned smaller velocity deficit observed in the near wake.

Spectra are probed along the Y direction from $Y = -0.3C$ to $Y = 0.1C$ in $\Delta Y = 0.01C$ increments at three spanwise locations, directly after the trough, the mid-point, and the peak (refer to Figure 22).

In Figure 23 spectra of the V velocity component (in the Y direction) are plotted. Each row corresponds to one spanwise location: directly after the trough, the mid-point, and the peak (from top to bottom). Each column corresponds to one streamwise location: very close to the trailing edge at $X = 1.05C$ (left column) and at $X = 1.40C$ (right column). At the very near

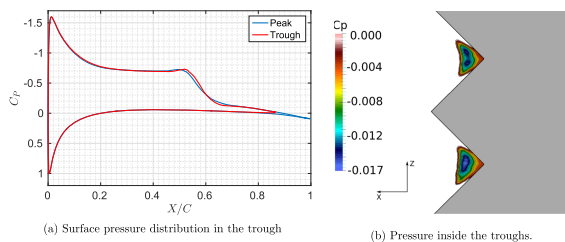


FIG. 19. Pressure distributions on the airfoil surface and inside the troughs.

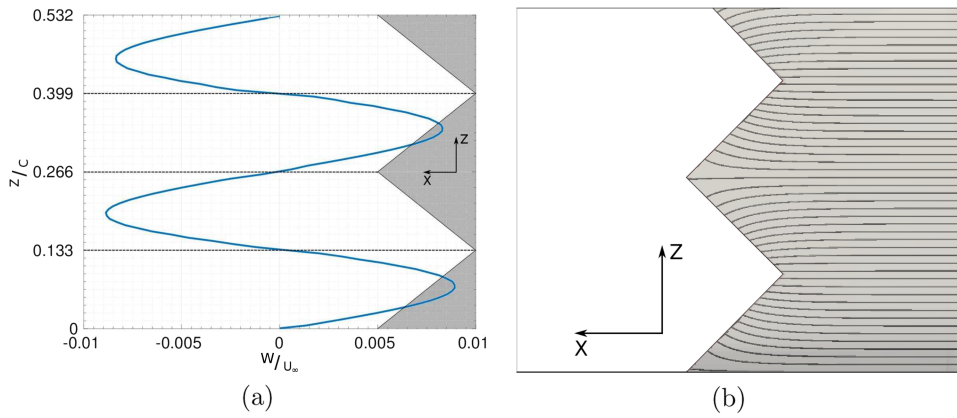


FIG. 20. (a) Spanwise velocity component (W) along the span (pressure side of the airfoil, at distance $0.05C$ upstream of the trailing edge trough). The dashed lines indicate the positions where $W = 0$. (b) Time-averaged streamlines at the pressure side of the airfoil.

wake ($X = 1.05C$) and directly after the trough, two distinct peaks can be observed: one located at $f_{se,1} = 3.8$ and one located at $f_{se,2} = 4.4$. As we move towards the mid-point between the trough and the peak, the energy of both peaks reduces but they can still be identified. At the serration, the peaks still appear to exist, albeit significantly attenuated. The reduction in the peak energy as we move from the trough to the peak indicates a strong shedding inhomogeneity along the span of the airfoil.

The two frequencies $f_{se,1}$ and $f_{se,2}$ are in almost perfect agreement with the dominant frequencies identified in the two previous airfoil cases. The dominant wake mode for the straight trailing edge was found to oscillate at $f_1 \approx f_{se,1}$, which was found to be the subharmonic of the natural frequency of the separating shear layer. The $f_{bl,1} \approx f_{se,2}$ frequency was found to be the shedding frequency of the flatback airfoil, which forced a lock-in between the shear layer and the wake shedding, as analysed in Sec. IV B. In the straight trailing edge airfoil, only the subharmonic was present in the wake, while for the flatback only the shedding frequency was present. For the serrated case, both can be detected.

In Figure 24 the spectra for 4 different points in the suction side of the airfoil are plotted. All of the points are located at $Z/C = 0.266$, which corresponds to a plane through the peak. Figure 24(b) on the right has zoomed-in at the small values of E_{vv} for better visualisation of the spectra at two points. The first point at $X/C = 0.47$ shows a similar behavior to that in Figure 8(a), namely, a broad spectrum at relatively high frequencies. As the shear layer transitions, three peaks appear at the points located at $X/C = 0.533$ and $X/C = 0.62$. The peak at $f_{se,3} = 7.4$ is very close to the shear layer

natural frequency observed at the straight trailing edge case, while the peaks at $f_{se,1}$ and $f_{se,2}$ are at the same frequencies already identified in Figure 23. At the fourth measurement point, at $X/C = 0.858$, i.e., directly before the trailing edge, the peak at $f_{se,3}$ has completely attenuated and only $f_{se,1}$ and $f_{se,2}$ are still dominant, an observation in agreement with the wake spectra of Figure 23.

If the trough bluntness, ϵ , is used as a length scale, the Strouhal number corresponding to the frequency $f_{se,2}$ is $St = 0.1628$. Nédic and Vassilicos¹⁰ studied a similar configuration and measured a Strouhal number equal to 0.203. However, the Reynolds number was three times larger and the boundary layers were tripped on both sides of the airfoil, as already mentioned. Due to tripping, the boundary layers were attached, so Nédic and Vassilicos¹⁰ detected only the trailing edge shedding frequency, $f_{se,2}$, and not $f_{se,1}$ which is due to the separating shear layer. This is fully consistent with the present findings.

Unlike the blunt trailing edge, where the shedding frequency was the only one present, in the serrated edge case, we detect two distinct frequencies: the subharmonic of the natural frequency and the trailing edge shedding frequency. Why the subharmonic frequency is observed for the serrated case and not for the blunt case? The reason is that the shedding for the serrated case is weaker due to the linear tapering of the thickness, from a maximum at the trough to almost zero at the peak. For the blunt trailing edge, the energy contained in the shedding frequency (Figure 14) is 5 times larger than that for the serrated trailing edge (Figure 23). This indicates that the forcing is much stronger for the blunt case, leading to a suppression of the subharmonic.

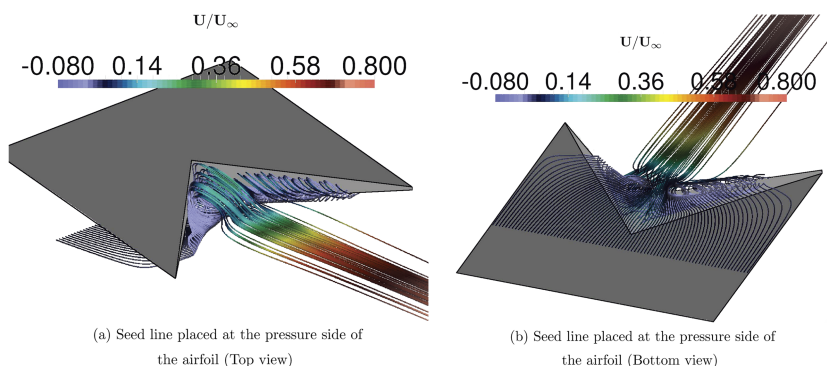


FIG. 21. Time averaged streamlines, color-coded with the streamwise velocity U/U_∞ .

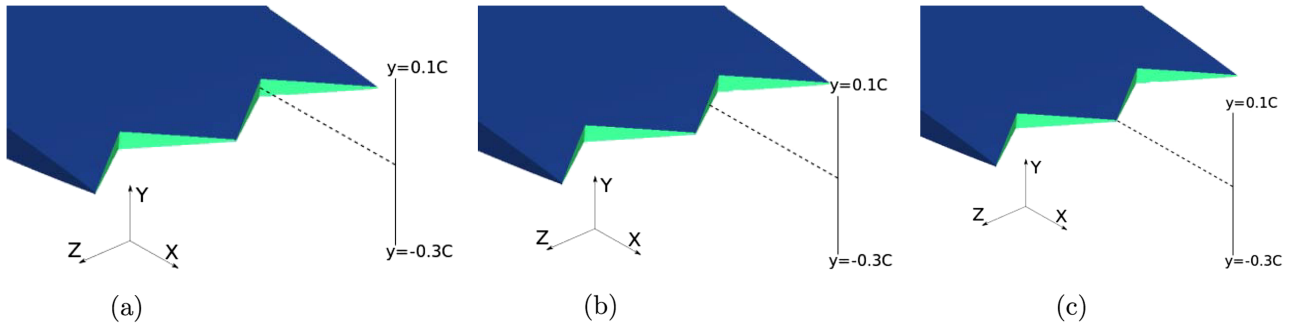
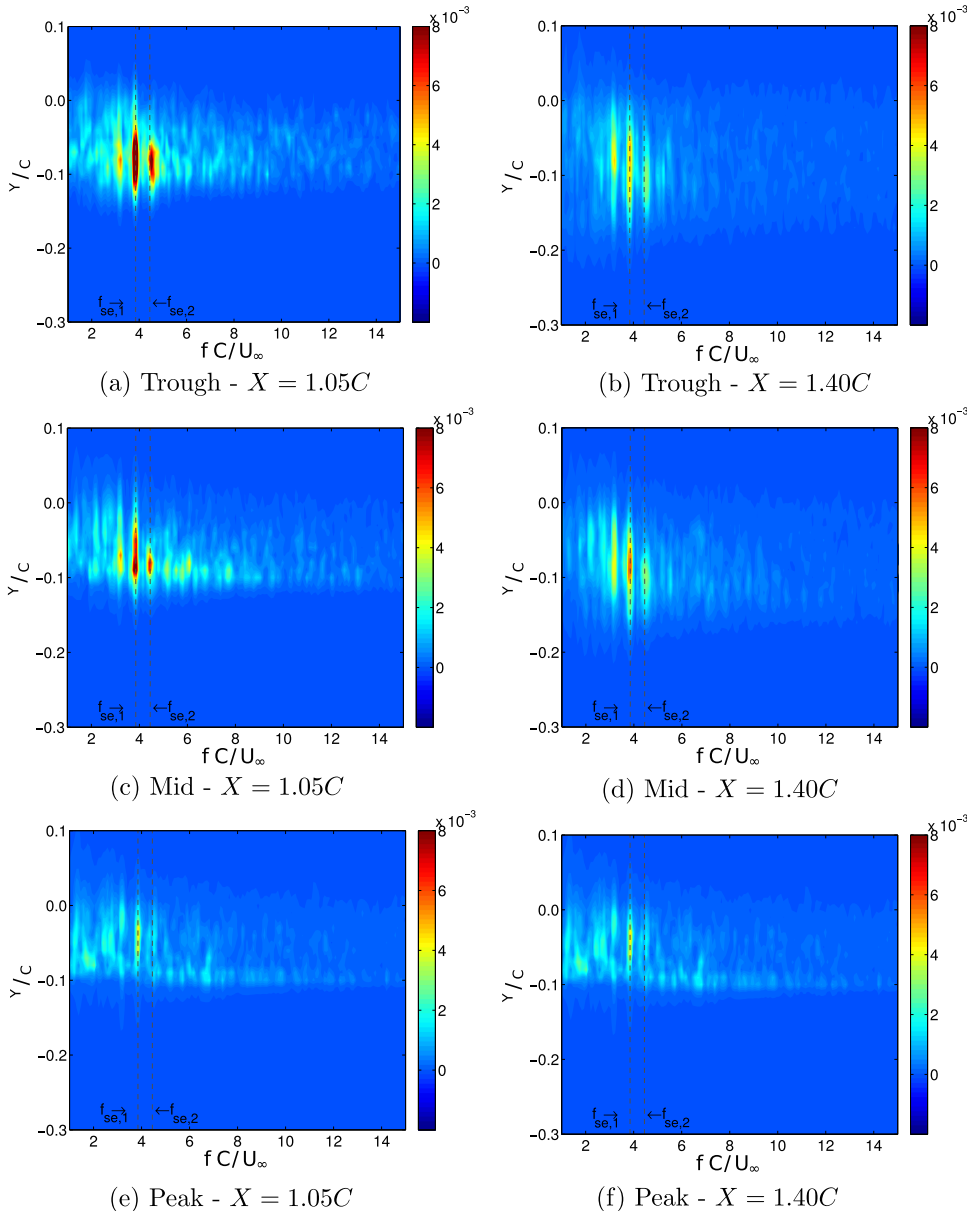


FIG. 22. Probing lines and their corresponding spanwise locations after the trough (a), the mid point (b), and the peak (c).

There are few other papers that have dealt with the flow around an airfoil with serrated trailing edges. Jones and Sandberg²⁸ have studied similar flows, but there is an important difference, as already mentioned in the Introduction: the serrations are attached to a straight trailing edge airfoil and are not cut into the body of the airfoil. The thickness is therefore

minimal and secondary patterns, as the one observed in this paper, were not reported.

In Figure 25, the normal Reynolds stresses are plotted for the serrated trailing edge airfoil. The left column shows the distributions at a spanwise plane through the serration peak, and the right column through the trough. The spanwise

FIG. 23. Power spectra of V velocity component for different cross-stream locations, extending from $Y = -0.3C$ to $Y = 0.1C$. Left column data are probed very close to the trailing edge peak ($X = 1.05C$), while right column data are probed at $X = 1.40C$. From top to bottom, the probing lines are aligned with the trough, the mid-point, and the peak of the serrations.

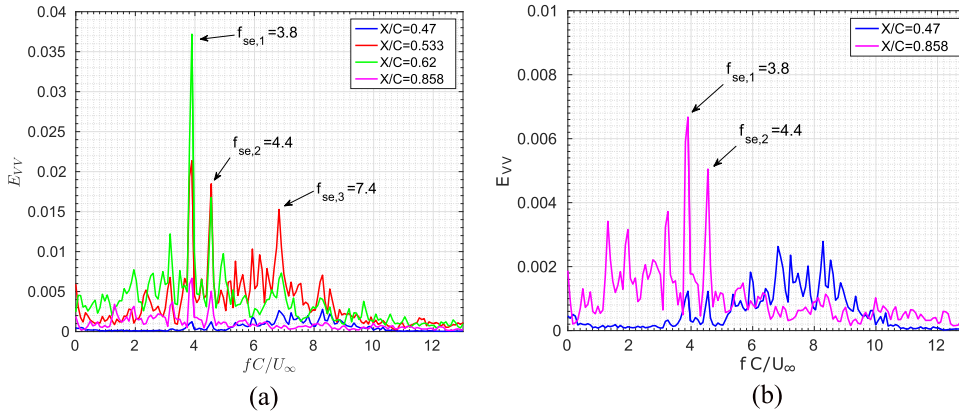


FIG. 24. (a) PSD of the cross velocity component at four streamwise locations at the suction side of the airfoil at $Z/C = 0.266$ (plane through the peak). (b) has zoomed in the region $E_{vv} \leq 0.01$ for better illustration of the signals at $X/C = 0.47$ and $X/C = 0.858$.

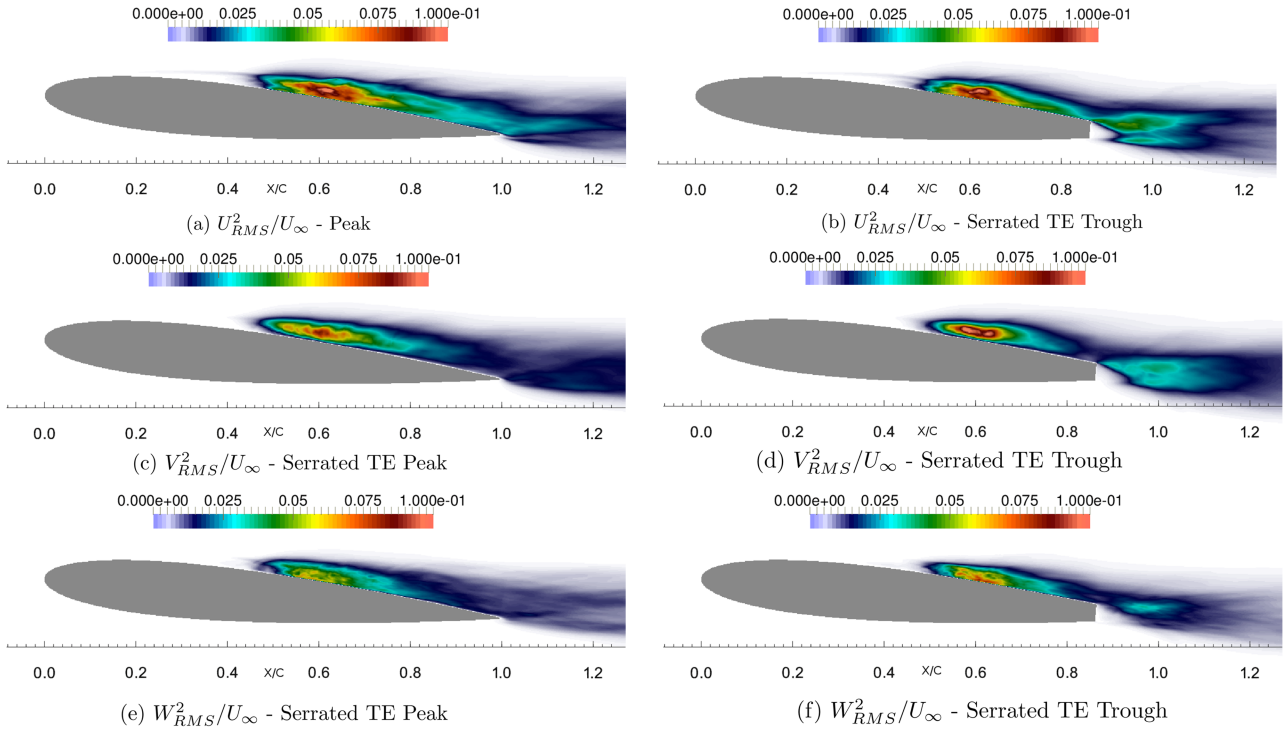


FIG. 25. Streamwise, cross-stream, and spanwise Reynolds stress distributions for the serrated trailing edge airfoil at a spanwise plane through a peak ((a), (c), and (e)) and through a trough ((b), (d), and (f)).

variation of the Reynolds stress distributions in the wake is clear. The wakes in the peak resemble those of the straight trailing edge airfoil shown in Figure 10 (left column), while in the trough plane, the distributions are similar to those of the flatback airfoil (Figure 10, right column). There is however a significant difference in the V_{RMS} component in the wake. Comparison between Figures 10(d) and 25(d) reveals that the intense shedding from the blunt trailing edge, which gives rise to an elongated region of cross-stream fluctuations extending up to almost half a chord length downstream, is significantly attenuated in the serrated airfoil both in terms of magnitude and size. This indicates that the intensity of the wake shedding is reduced due to the presence of the serrations and agrees with the previous discussion of the spectra. Experimental measurements¹⁰ also confirm this behaviour. Another difference worth mentioning is the peak which appears in the spanwise velocity fluctuations W_{RMS} directly after the trailing edge trough (Figure 25(f)). This peak indicates a strong spanwise fluc-

tuation of the flow field on this location, originating from the 3D secondary flow pattern discussed earlier in this section.

V. CONCLUSIONS

This paper considered the effect of trailing edge modifications on the time-average and dynamic characteristics of the separating shear layer and the near wake of a NACA 0012 airfoil. Two airfoils, one with blunt and the other with serrated trailing edge, were compared with a standard NACA 0012 airfoil with straight trailing edge. The DMD method was applied to extract the dominant modes in the wake and the corresponding frequencies. For the standard airfoil, two modes were detected: one with high frequency which corresponds to the Kelvin Helmholtz instability originating from the separating shear layer, and one with low frequency that emerges as a subharmonic and is detectable in the suction side and the near wake.

In the blunt trailing edge airfoil, the two shear layer frequencies were strongly suppressed, and the frequency of the shear layer was locked to the shedding frequency due to the exposed bluntness. Examination of the spatial structure of the shedding mode revealed an upstream effect on the suction side of the airfoil. The shedding frequency was close to the subharmonic of the natural shear layer frequency and, under such conditions, lock-on is known to occur.

When the trailing edge consists of triangular serrations with tapering bluntness, the strength of the vortices shed from the exposed blunt part was strongly attenuated compared to the flatback airfoil. In this case, both the subharmonic and the shedding frequency were present in the velocity spectra, in the wake as well as in the suction side of the airfoil. In contrast with the flatback airfoil, in this case, lock-in was not observed. This was attributed to the weaker forcing amplitude due to the decorrelation of the vortices shed along the span.

ACKNOWLEDGMENTS

This work was funded by the MULTISOLVE EU project (Grant Agreement No. 317269) under the ITN Marie Curie framework of the European Commission. The simulations were performed on Archer (to which access was provided through the UK Turbulence Consortium Grant No. EP/L000261/1) and the CX2 facility of Imperial College. The authors would also like to thank Professor C. Vassilicos for his useful comments on this work.

- ¹H. Smith and R. Schaefer, NACA Technical Note TN 2074, NACA, 1950.
- ²K. Standish and C. van Dam, "Aerodynamic analysis of blunt trailing edge airfoils," *J. Sol. Energy Eng.* **125**, 479 (2003).
- ³J. Baker, E. Mayda, and C. van Dam, "Experimental analysis of thick blunt trailing-edge wind turbine airfoils," *J. Sol. Energy Eng.* **128**, 422 (2006).
- ⁴H. Xu, W. Shen, W. Zhu, H. Yang, and C. Liu, "Aerodynamic analysis of trailing edge enlarged wind turbine airfoils," *J. Phys.: Conf. Ser.* **524**(1), 012010 (2014).
- ⁵R. Chow and C. van Dam, "Computational investigations of blunt trailing-edge and twist modifications to the inboard region of the NREL 5MW rotor," *Wind Energy* **16**, 445 (2013).
- ⁶M. Tanner, Technical Report AD0752171, DTIC Document, 1970.
- ⁷S. Gai and S. Sharma, "Experiments on the reduction of base drag of a blunt trailing edge aerofoil in subsonic flow," *Aeronaut. J.* **85**(844), 206 (1981).
- ⁸O. Rodríguez, "Base drag reduction by control of the three-dimensional unsteady vortical structures," *Exp. Fluids* **11**, 218 (1991).
- ⁹D. Krentel and W. Nitsche, "Investigation of the near and far wake of a bluff airfoil model with trailing edge modifications using time-resolved particle image velocimetry," *Exp. Fluids* **54**, 1 (2013).
- ¹⁰J. Nedić and J. C. Vassilicos, "Vortex shedding and aerodynamic performance of airfoil with multiscale trailing-edge modifications," *AIAA J.* **53**, 3240 (2015).
- ¹¹N. Tombazis, Ph.D. thesis, University of London Library, 1993.
- ¹²P. W. Bearman and N. Tombazis, "The effects of three-dimensional imposed disturbances on bluff body near wake flows," *J. Wind Eng. Ind. Aerodyn.* **49**, 339 (1993).
- ¹³N. Tombazis and P. Bearman, "A study of three-dimensional aspects of vortex shedding from a bluff body with mild geometric disturbance," *J. Fluid Mech.* **330**, 850112 (1997).
- ¹⁴J. Cai, T. L. Chng, and H. M. Tsai, "On vortical flows shedding from a bluff body with a wavy trailing edge," *Phys. Fluids* **20**, 064102 (2008).
- ¹⁵P. Lissaman, "Low-Reynolds-number airfoils," *Annu. Rev. Fluid Mech.* **15**, 223 (1983).
- ¹⁶R. Kotapati, R. Mittal, O. Marxen, F. Ham, D. You, and L. N. Cattafesta, "Nonlinear dynamics and synthetic-jet-based control of a canonical separated flow," *J. Fluid Mech.* **654**, 65 (2010).
- ¹⁷M. Alam and N. D. Sandham, "Direct number simulation of short laminar separation bubbles with turbulent reattachment," *J. Fluid Mech.* **403**, 223 (2000).
- ¹⁸O. Marxen and U. Rist, "Mean flow deformation in a laminar separation bubble: separation and stability characteristics," *J. Fluid Mech.* **660**, 37 (2010).
- ¹⁹U. Rist and K. Augustin, "Control of laminar separation bubbles using instability waves," *AIAA J.* **44**, 2217 (2006).
- ²⁰O. Marxen, M. Lang, and U. Rist, "Vortex formation and vortex breakup in a laminar separation bubble," *J. Fluid Mech.* **728**, 58 (2013).
- ²¹O. Marxen and D. Henningson, "The effect of small-amplitude convective disturbances on the size and bursting of a laminar separation bubble," *J. Fluid Mech.* **671**, 1 (2011).
- ²²D. Postl, W. Balzer, and H. Fasel, "Control of laminar separation using pulsed vortex generator jets: Direct numerical simulations," *J. Fluid Mech.* **676**, 81 (2011).
- ²³P. Spalart and K. Strelets, "Mechanisms of transition and heat transfer in a separation bubble," *J. Fluid Mech.* **403**, 329 (2000).
- ²⁴H. Shan, L. Jiang, and C. Liu, "Direct numerical simulation of flow separation around a NACA 0012 airfoil," *Comput. Fluids* **34**, 1096 (2005).
- ²⁵L. Jones, R. Sandberg, and N. Sandham, "Direct numerical simulations of forces and unforced separation bubbles on an airfoil at incidence," *J. Fluid Mech.* **602**, 175 (2008).
- ²⁶O. Lehmkuhl, I. Rodríguez, A. Baez, A. Oliva, and C. Pérez-Segarra, "On the large-eddy simulations for the flow around aerodynamic profiles using unstructured grids," *Comput. Fluids* **84**, 176 (2013).
- ²⁷S. Hosseini, R. Vinuesa, P. Schlatter, A. Hanifi, and D. Henningson, in 15th European Turbulence Conference, 2015.
- ²⁸L. Jones and R. Sandberg, "Acoustic and hydrodynamic analysis of the flow around an aerofoil with trailing-edge serrations," *J. Fluid Mech.* **706**, 295 (2012).
- ²⁹R. Sandberg and L. Jones, "Direct numerical simulations of low Reynolds number flow over airfoils with trailing-edge serrations," *J. Sound Vibration* **330**, 3818 (2011).
- ³⁰R. I. Issa, "Solution of the implicitly discretized fluid flow equations by operator-splitting," *J. Comput. Phys.* **62**, 40 (1986).
- ³¹S. Balay, S. Abhyankar, M. Adams, J. Brown, P. Brune, K. Buschelman, V. Eijkhout, W. Gropp, D. Kaushik, M. Knepley *et al.*, Technical Report ANL-95/11 Revision 3.5 Argonne National Laboratory (ANL), 2014.
- ³²R. D. Falgout, J. E. Jones, and U. M. Yang, "The design and implementation of hypre, a library of parallel high performance preconditioners," in *Numerical Solution of Partial Differential Equations on Parallel Computers* (Springer, 2006), pp. 267–294.
- ³³W. Zhang and R. Samtaney, "A direct numerical simulation investigation of the synthetic jet frequency effects on separation control of low-Re flow past an airfoil," *Phys. Fluids* **27**, 055101 (2015).
- ³⁴C. Williamson, "Vortex dynamics in the cylinder wake," *Annu. Rev. Fluid Mech.* **28**, 477 (1996).
- ³⁵P. Moin and K. Mahesh, "Direct numerical simulation: A tool in turbulence research," *Annu. Rev. Fluid Mech.* **30**, 539 (1998).
- ³⁶D. Donzis, P. Yeung, and K. Sreenivasan, "Dissipation and enstrophy in isotropic turbulence: Resolution effects and scaling in direct numerical simulations," *Phys. Fluids* **20**, 045108 (2008).
- ³⁷W. Zhang and R. Samtaney, "Assessment of spanwise domain size effect on the transitional flow past an airfoil," *Comput. Fluids* **124**, 39 (2016).
- ³⁸M. O'Meara and T. Mueller, "Laminar separation bubble characteristics on an airfoil at low Reynolds numbers," *AIAA J.* **25**, 1033 (1987).
- ³⁹M. Boutilier and S. Yarusevych, "Separated shear layer transition over an airfoil at a low Reynolds number," *Phys. Fluids* **24**, 084105 (2012).
- ⁴⁰S. Yarusevych, P. Sullivan, and J. Kawall, "Coherent structures in an airfoil boundary layer and wake at low Reynolds numbers," *Phys. Fluids* **18**, 044101 (2006).
- ⁴¹H. Horton, Ph.D. thesis, Queen Mary, University of London, 1968.
- ⁴²J. Jeong and F. Hussain, "On the identification of a vortex," *J. Fluid Mech.* **285**, 69 (1995).
- ⁴³G. Berkooz, P. Holmes, and J. L. Lumley, "The proper orthogonal decomposition in the analysis of turbulent flows," *Annu. Rev. Fluid Mech.* **25**, 539 (1993).
- ⁴⁴P. J. Schmid, L. Li, M. Juniper, and O. Pust, "Applications of the dynamic mode decomposition," *Theor. Comput. Fluid Dyn.* **25**, 249 (2011).
- ⁴⁵P. J. Schmid, "Dynamic mode decomposition of numerical and experimental data," *J. Fluid Mech.* **656**, 5 (2010).
- ⁴⁶Z.-H. Wan, L. Zhou, B.-F. Wang, and D.-J. Sun, "Dynamic mode decomposition of forced spatially developed transitional jets," *Eur. J. Mech. B/Fluids* **51**, 16 (2015).

- ⁴⁷P. Baj, P. J. Bruce, and O. R. Buxton, "The triple decomposition of a fluctuating velocity field in multiscale flow," *Phys. Fluids* **27**, 075104 (2015).
- ⁴⁸R. Dunne and B. J. McKeon, "Dynamic stall on a pitching and surging airfoil," *Exp. Fluids* **56**, 1 (2015).
- ⁴⁹S. Mariappan, A. Gardner, K. Richter, and M. Raffel, "Analysis of dynamic stall using dynamic mode decomposition technique," *AIAA J.* **52**, 2427 (2014).
- ⁵⁰M. R. Jovanović, P. J. Schmid, and J. W. Nichols, "Sparsity-promoting dynamic mode decomposition," *Phys. Fluids* **26**, 024103 (2014).
- ⁵¹S. Bagheri, "Computational hydrodynamic stability and flow control based on spectral analysis of linear operators," *Arch. Comput. Methods Eng.* **19**, 341 (2012).
- ⁵²S. Yarusevych, P. E. Sullivan, and J. G. Kawall, "On vortex shedding from an airfoil in low-Reynolds-number flows," *J. Fluid Mech.* **632**, 245 (2009).
- ⁵³C.-M. Ho and P. Huerre, "Perturbed free shear layers," *Annu. Rev. Fluid Mech.* **16**, 365 (1984).
- ⁵⁴A. Dovgal, V. Kozlov, and A. Michalke, "Laminar boundary layer separation: Instability and associated phenomena," *Prog. Aerosp. Sci.* **30**, 61 (1994).
- ⁵⁵L. E. Jones, Ph.D. thesis, University of Southampton, 2008.
- ⁵⁶L.-S. Huang and C.-M. Ho, "Small scale transition in a plane mixing layer," *J. Fluid Mech.* **210**, 475 (1990).
- ⁵⁷M. Drela and H. Youngren, *Xfoil 6.94 User Guide* (MIT Aero & Astro, 2001).
- ⁵⁸X. Chen and R. Agarwal, "Optimization of flatback airfoils for wind-turbine blades using a genetic algorithm," *J. Aircr.* **49**, 622 (2012).
- ⁵⁹D. Greenblatt and I. Wygnanski, "The control of flow separation by periodic excitation," *Prog. Aerosp. Sci.* **36**, 487 (2000).
- ⁶⁰C.-M. Ho and L.-S. Huang, "Subharmonics and vortex merging in mixing layers," *J. Fluid Mech.* **119**, 443 (1982).
- ⁶¹S. L. Prigent, O. Buxton, and P. J. Bruce, in *54th AIAA Aerospace Sciences Meeting, San Diego* (AIAA, 2016), p. 0852.